



## Dimensions

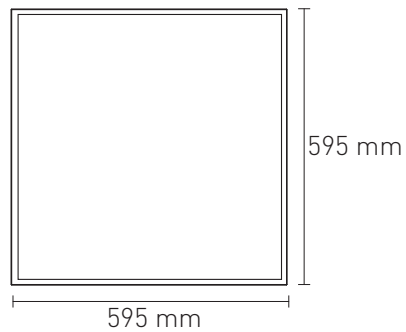


## Recessed Installation


**Step 1:** Switch off the power and remove the necessary ceiling tile(s) to create the required opening.

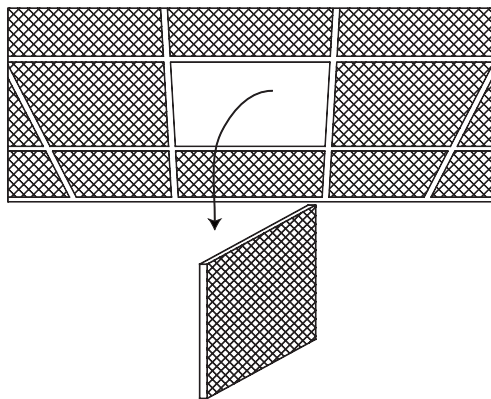


**Step 2:** Connect the mains supply to the LED driver as illustrated. Attach the panel's input cable to the driver's output connector, ensuring all wiring is secure.

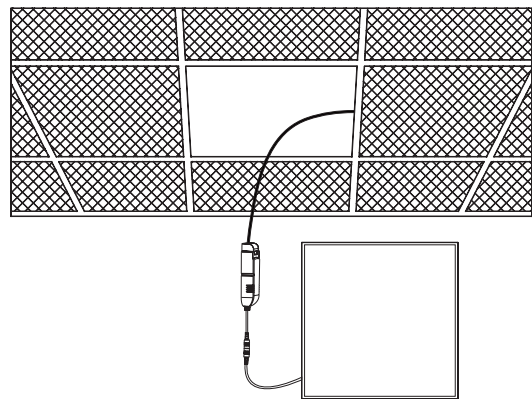

**Step 3:** Lift and guide the fixture through the opening in the ceiling grid, keeping it level as you position it above the grid.

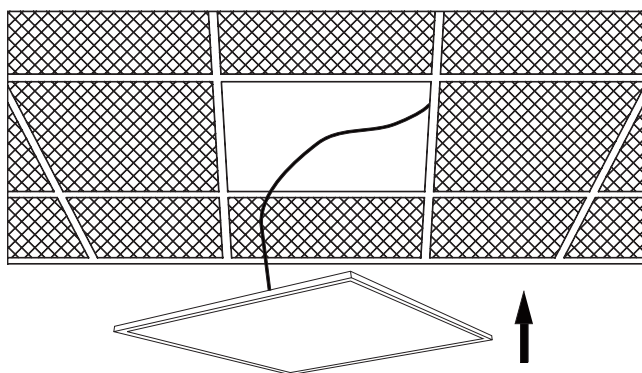


**Step 4:** Once the fixture is fully above the grid, slide it into place so the metal frame sits flat, level, and evenly supported on all four sides by the T-bar grid. Restore power and switch on the light.

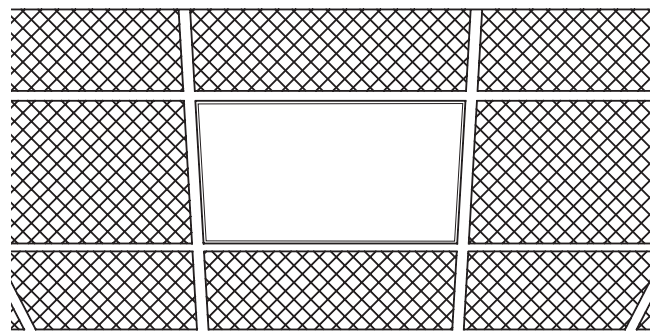


### Suspended Installation


**Step 1:** Switch off the power and create an opening in the ceiling for the power supply cable.

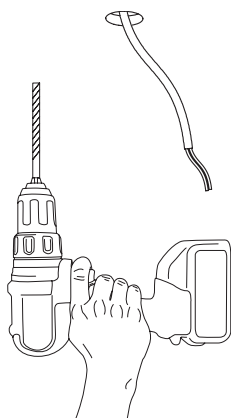


**Step 2:** Fix the ceiling anchors into the ceiling. (Use the measurements of the product shown above as a reference for the spacing required).

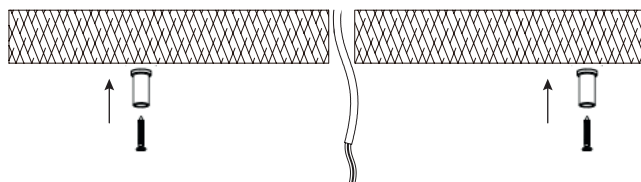


**Step 3:** Insert the suspension locks into the holes in the centre of the corner brackets and slide across and twist until they lock into place as shown in (3a) and (3b).

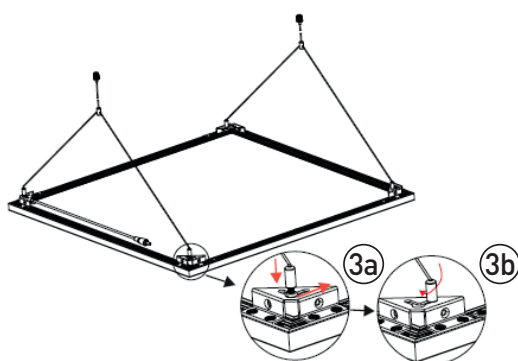

**Step 4:** Fix both ends of the suspension cables: one end to the ceiling anchors and the other to the suspension locks attached to the panel.

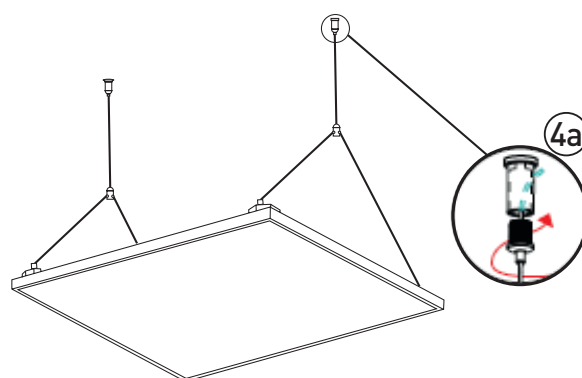

**Step 5:** Connect the mains supply to the driver, then attach the panel's input wire to the driver's output.

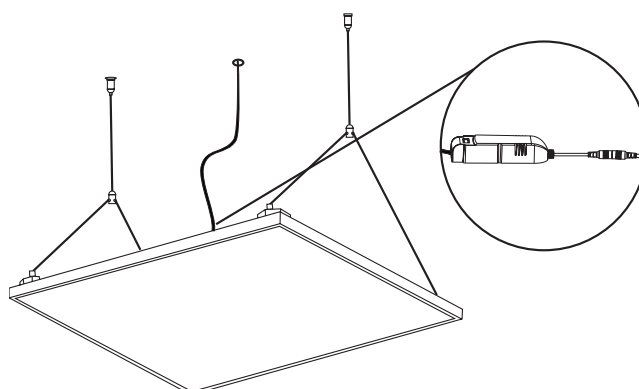

# ORLLED-SL-6060

## Installation Instructions

### Disclaimer

This product must be installed by a skilled or instructed person in accordance with the current edition of the IET Wiring Regulations BS 7671 "Requirements for Electrical Installations" and the Buildings Regulations, as may be applicable subject to the location and country of the installation.

Should this product be modified, misused or not installed as per the instructions given, the product warranty shall be rendered void.

All information contained within these installation instructions manual is provided in good faith. Orlight shall not be held responsible for any losses incurred as a result of the Customer's failure to follow the instructions manual thoroughly and in its entirety or failing to inspect the product for missing parts and/or any defects prior to installation.

For full Terms and Conditions, please visit our website at: <https://www.orlight.com/en/terms-and-conditions.html>

### Wiring

Disconnect the mains supply before installation. Ensure that the unit is installed and maintained by a certified professional and that installation conforms to any local building regulations.

### Mains Installation:

Connect the mains to the LED driver provided. This panel is of Class II construction complete with a Class II LED driver and should not be earthed. Connect mains to the driver observing the polarities as indicated on the driver. Ensure that the plug secured to the LED panel is attached to driver and the screw cap is tightened. Place the driver on a flat non-flammable surface. The panel should NOT be covered with insulation, we advise 100mm clear air space around it.

**Note: Light fittings in general can become hot whilst in operation. It is advisable that they do not come into contact with any flammable materials such as fabrics, furniture, soft furnishings or touched during/after operation.**