


Instructions


Step 1: To Reconnect the Connector Assembly:

Disconnect the male connector from the female connector. Insert a suitable fixing (not supplied) into the female connector—e.g., a CSK M4 screw with wall plug. Ensure the steel wire is securely threaded through the male connector

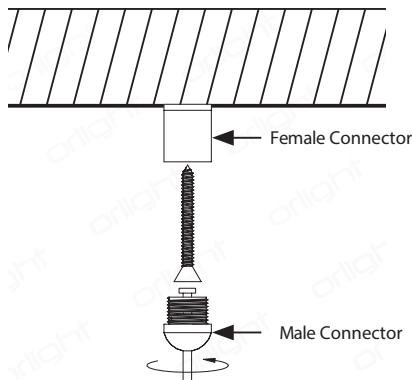


Step 2: To Secure the Ceiling Fixture:

Drill a hole at the desired ceiling location. Insert the appropriate wall plug into the hole, then fasten the female connector into the ceiling with a suitable screw. Check that the female connector is locked into place before attaching the male connector.

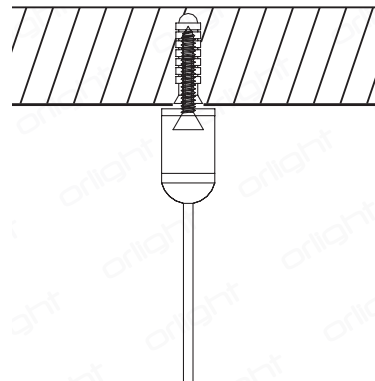


Step 3: To Adjust Steel Wire Length:

Press the plunger down on the angle gripper. Feed the steel wire through the gripper and adjust to the desired length. Release the plunger to securely lock the wire in place.



Step 4: To Secure the Product:

Insert the M6 screw through the top surface of the product and into the base of the angle gripper. Ensure it is fully tightened and securely locked in place.

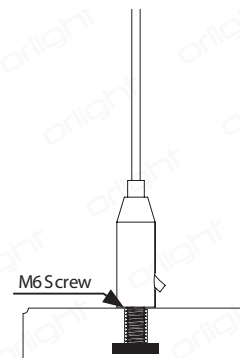

Additional Information

All suspension kits have been tested in accordance with BS EN ISO 6892-1: 2016 A224 and MTP 2.
SUS-KIT-M4-MALE; SWL (Safe Working Load) 6KG at a 10:1 Safety Factor

* Please note, all information contained within these installation instructions manual is provided in good faith. Orlight shall not be held responsible for any losses incurred as a result of the Customer's failure to follow the instructions manual thoroughly and in its entirety or failing to inspect the product for missing parts and/or any defects prior to installation.

For full Terms and Conditions, please visit our website at: <https://www.orlight.com/terms-and-conditions>

We recommend that this product is installed by a competent person in accordance with the latest edition of the IET Wiring Regulations BS 7671 "Requirements for Electrical Installations" and the Buildings Regulations, as may be applicable subject to the location and country of the job or installation.

For more information and installation guidelines please refer to "Guide on Lighting Risks and Regulations" which can be downloaded from the website: https://www.orlight.com/content/files/orlight/resources/Guide_on_Lighting_Risks_and_Regulations_2020.pdf

Additional Information



Use components supplied in the kit only. Do not use coated wires.




Do not paint or lacquer lines or hangers.



Ensure all parts are dry and free of any lubricants.



Suspend static loads only. No dynamic loading of any sort.



Ensure that safety work load (SWL) of the kit has been observed.




DO NOT extend the lengths by joining the wires.



Ensure that safety work load (SWL) of the kit has been observed.



DO NOT stand on suspended products.



The SWL is calculated on vertical loads only. If installing at any angles please ask ORLIGHT technical.



DO NOT use in chemically corrosive environments, e.g swimming pool should be used in dry environment only.



Where "Y" Fits are as part of the kit. Ensure that Y Fits are not installed above 50 Degrees.

PLEASE NOTE: *Should this product be modified, misused or not installed as per the instructions given, the product warranty shall be rendered void.*