


NEBULADQ-150-SUS

Installation Instructions


Dimensions

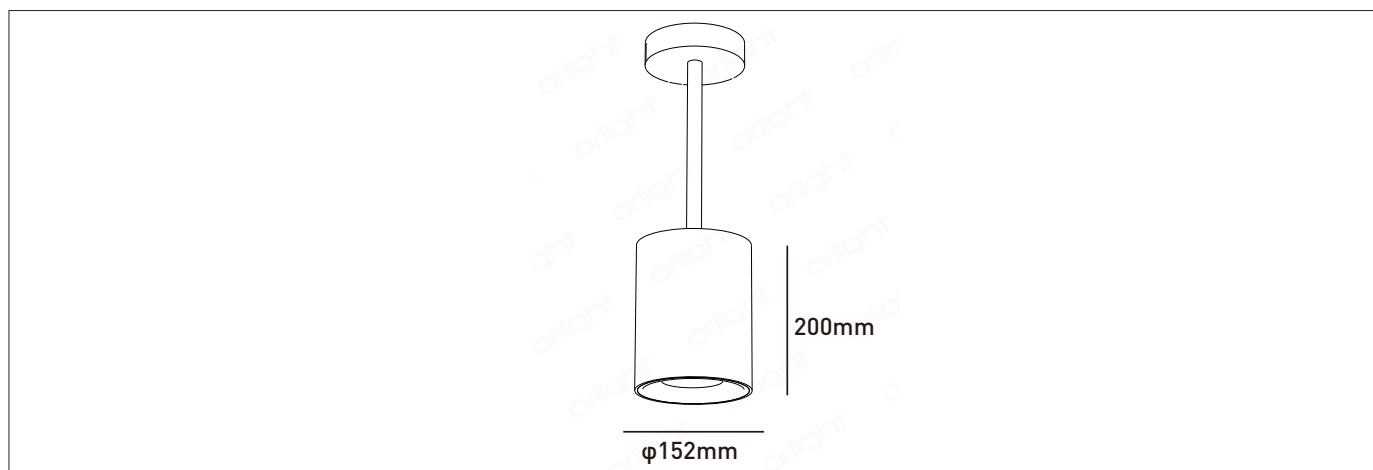

Instructions


Step 1 – Lower the Ceiling Canopy

Slide the ceiling canopy down along the suspension cable to expose the mounting bracket.



Step 2 – Position the Mounting Bracket


Hold the mounting bracket against the ceiling, aligning it with the intended fixture location.



Step 3 – Prepare for Wood Ceiling Installation

For a wooden ceiling, drill the necessary holes and pull the electrical wires through the centre opening.


Wood ceiling installation



Step 4 – Prepare for Concrete Ceiling Installation

For a concrete ceiling, drill holes at the marked positions, insert the wall plugs, and prepare the screws for securing the mounting bracket.


Concrete ceiling installation



Step 5 – Connect the Electrical Wiring

Match and connect the supply wires to the fixture wires according to your dimming method:


- Non/Phase Dim – Connect Live (Brown), Neutral (Blue), and Earth (Green/Yellow).
- 1-10V / DALI Dim – Also connect control wires as per diagram (Grey, Violet, etc.).

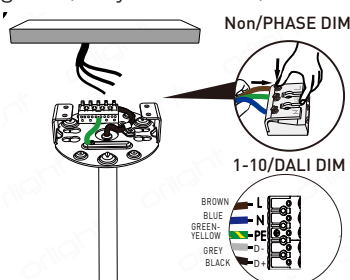

Step 6 – Secure to Wood Ceiling

Align the bracket holes with the drilled holes and secure the bracket to the wooden ceiling using four screws.

Wood ceiling installation




Instructions Continue

Step 7 – Secure to Concrete Ceiling


Align the bracket holes with the drilled holes containing wall plugs, then secure the bracket with four screws.

Concrete ceiling installation




Step 8 – Raise and Attach the Canopy

Lift the ceiling canopy back into position, ensuring the magnets engage to hold it securely.



Step 9 – Complete the Installation

Ensure the canopy is flush with the ceiling, the fixture is level, and all wiring is neatly enclosed.



Additional Information

This product must be installed by a skilled or instructed person in accordance with the current edition of the IET Wiring Regulations BS 7671 "Requirements for Electrical Installations" and the Buildings Regulations, as may be applicable subject to the location and country of the installation.

Should this product be modified, misused or not installed as per the instructions given, the product warranty shall be rendered void.

All information contained within these installation instructions manual is provided in good faith. Orlight shall not be held responsible for any losses incurred as a result of the Customer's failure to follow the instructions manual thoroughly and in its entirety or failing to inspect the product for missing parts and/or any defects prior to installation.

For full Terms and Conditions, please visit our website at: <https://www.orlight.com/en/terms-and-conditions.html>

Hole Cut Out:

Orlight does not recommend cutting of holes prior to receipt of product in hand. Please refer to reverse or Orlight's technical support/website for recommended hole cut out.

Wiring:

Disconnect the mains supply before installation. Ensure that the unit is installed and maintained by a certified professional and that installation conforms to any local building control standard applicable.

Accessories:

Please ensure that any accessory used in conjunction with these products is approved by Orlight. Failure to do so will void any product guarantee. Orlight will not be held responsible for any loss incurred be it direct or consequential.

NOTE – Light fittings in general can become hot whilst in operation. It is advisable that they do not come into contact with any flammable materials such as fabrics, furniture, soft furnishings or touched during/after operation.