


Installation Procedure


WARNING ⚡

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.




**Turn Off
Power Supply**


Surface Mount Installation




Quick-fit bracket



Anti-theft clamp



Anti-vibration bracket

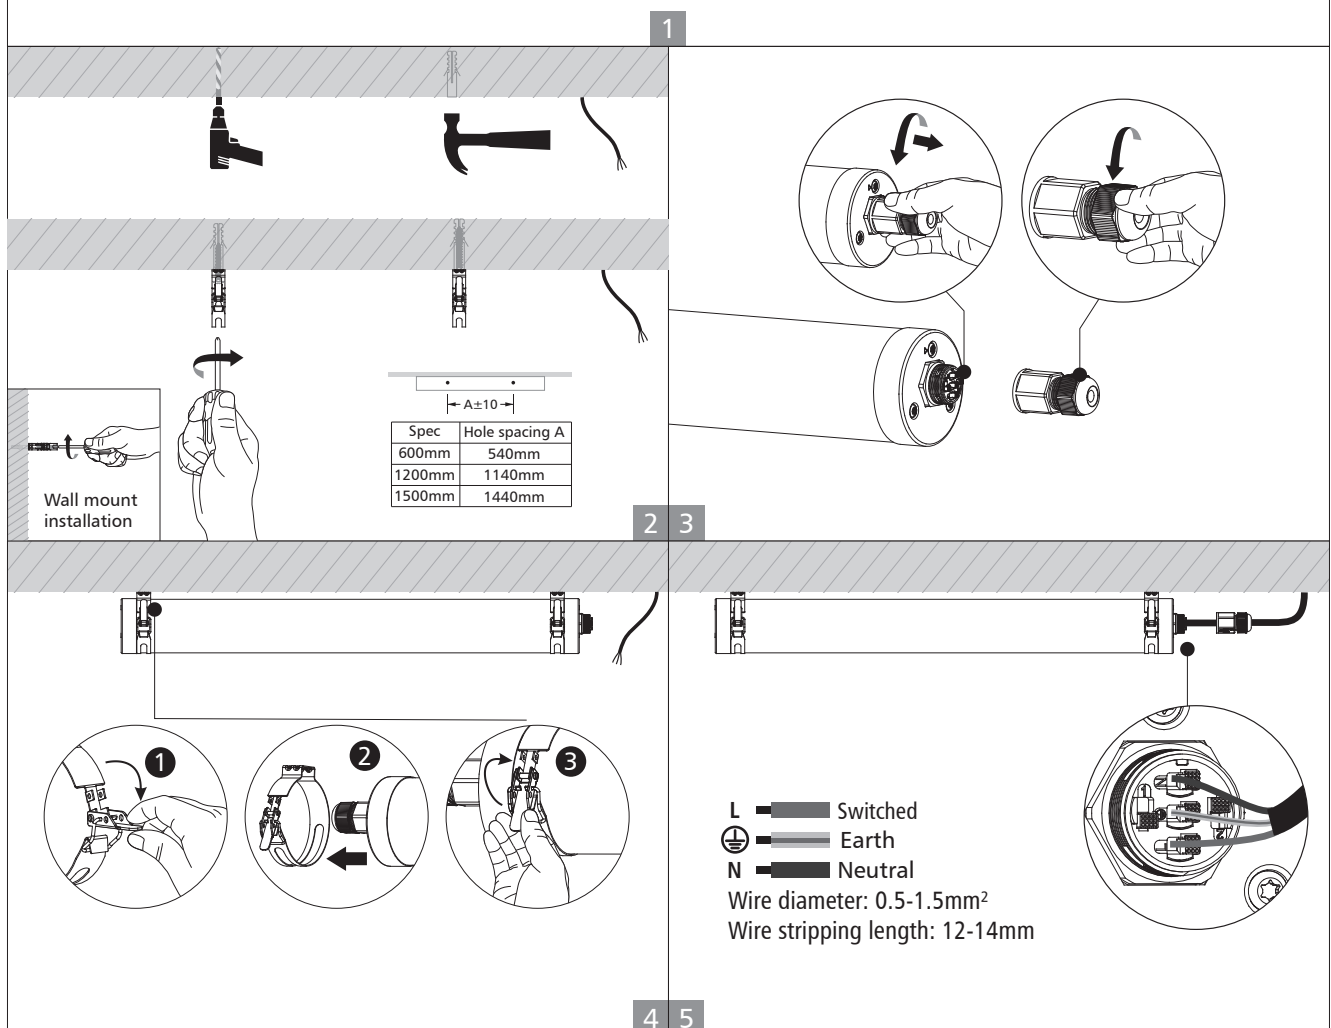

Installation Procedure Continued

Plastic connector

Standard

L — Switched
⊕ — Earth
N — Neutral

Emergency

L — Unswitched
N — Neutral
1 — Switched
2 — Earth

DALI

L — Switched
⊕ — Earth
N — Neutral
1 — DA/L V+
2 — DA/N V-

Steel connector

Standard

Brown — Switched
Yellow/Green — Earth
Blue — Neutral

Emergency

Black — Unswitched
Blue — Neutral
Brown — Switched
Yellow/Green — Earth

DALI

Brown — Switched
Yellow/Green — Earth
Blue — Neutral
Black — DA/L V+
Gray — DA/N V-

6-1

6-2

6-1

6-2

7

8

7

8

COMPLETE

Pendant Installation

Press to adjust the length of the suspension wire

1

2

3

4

Spec	Hole spacing A
600mm	540mm
1200mm	1140mm
1500mm	1440mm

1

2

3

4

Pendant Installation Continued

5

6

L — Switched
⊕ — Earth
N — Neutral
 Wire diameter: 0.5-1.5mm²
 Wire stripping length: 12-14mm

Plastic connector

Standard

L — Switched
⊕ — Earth
N — Neutral

Emergency

L — Unswitched
N — Neutral
1 — Switched
2 — Earth

DALI

L — Switched
⊕ — Earth
N — Neutral
1 — DA/L V+
2 — DA/N V-

7-1

Steel connector

Standard

L — Switched
⊕ — Earth
N — Neutral
 Brown — Switched
 Yellow/Green — Earth
 Blue — Neutral

Emergency

L — Unswitched
N — Neutral
1 — Switched
2 — Earth
 Black — Unswitched
 Blue — Neutral
 Brown — Switched
 Yellow/Green — Earth

DALI

L — Switched
⊕ — Earth
N — Neutral
1 — DA/L V+
2 — DA/N V-
 Brown — Switched
 Yellow/Green — Earth
 Blue — Neutral
 Black — DA/L V+
 Gray — DA/N V-

7-2

8


9

COMPLETE

LUNEX

Installation Instructions

Splicing Installation

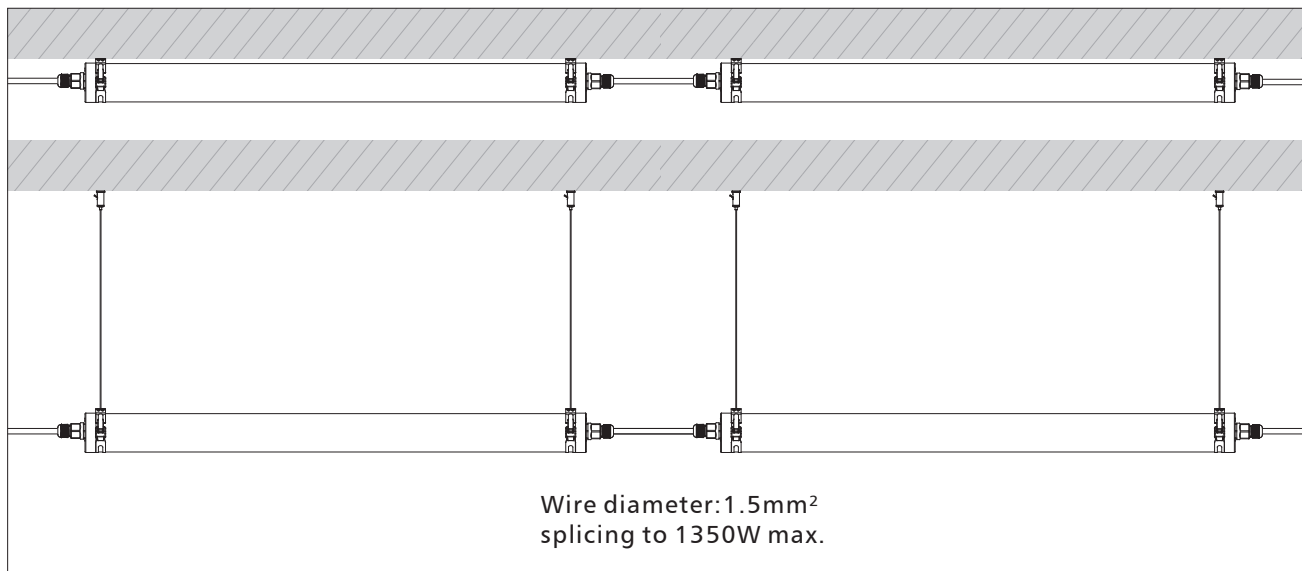

Emergency wire connection

