


Ref:

NEBULA200-43W-WH-4K-1-10V


Item No: NEBULA – 12301

orlight[®]
FROM SOURCE TO SITE

NEBULA200 is a high-powered, UGR<19 recessed downlight, constructed from Aluminium and rated to IP54. Deep recessed design finished in white, with a choice of interchangeable reflectors. Detachable rear case for ease of maintenance once installed. Attractive appearance with great efficiency, ideal for commercial and residential environments. Supplied with a 30° optic as standard. 18° and 60° optic available to order. Orlight does not recommend cutting holes before product is received.

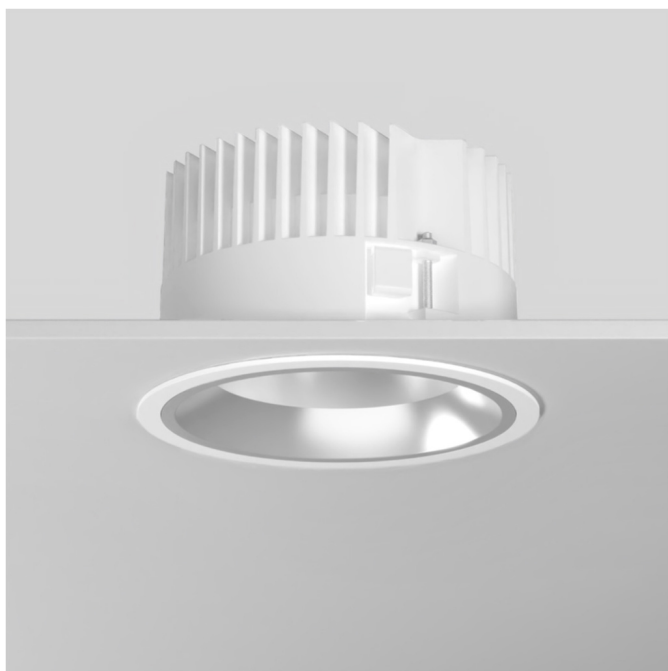

DIMENSIONS

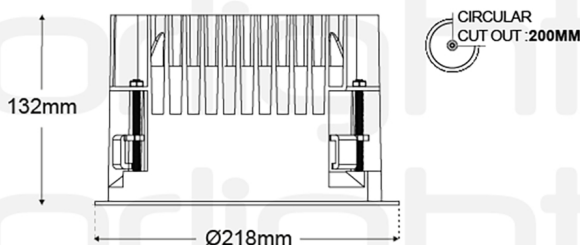

OPTICAL PERFORMANCE

Wattage	43W
Lumen Output	5547LM
Efficacy	129LM/W
CCT	4000K
CRI	CRI > 85
Binning	2 STEP MACADAMS
Beam Angle	18° / 30° / 60°
UGR	UGR < 19
Chipset	CITIZEN LED CHIPSET
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	1050MA
Driver Configuration	REMOTE
Control	1-10V

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	218 MM
Height	132 MM
Cutout	200 MM
Weight	1.765KG
Tilt	FIXED
Finish	WHITE
RAL	RAL 9016
IP Rating	IP54
Operating Ambient Temperature	-20°C - +35°C



EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

NEBULA200-43W-WH-4K-1-10V

Item No: NEBULA – 12301

LIGHT DISTRIBUTION



COMPATIBLE REFLECTORS



NEBULA200-RF-BL
12308
Nebula Round Reflector



NEBULA200-RF-WH
12309
Nebula Round Reflector