

Ref:

CR-7-3000K-DALI

Item No: CR7 – 10587


orlight[®]
FROM SOURCE TO SITE

Orlight's 7W CR7 LED constant current GU10 lamp provides superior performance in a small package. This lamp features constant current integral circuitry and can be supplied with inline DALI control. CREE CXB1507 chipset which delivers up to 991 lumens and ensures uniformity of a 38° beam angle.



IP20

DIMENSIONS

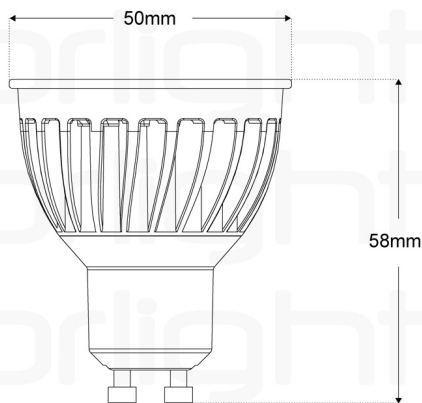

OPTICAL PERFORMANCE

Wattage	8W
Lumen Output	966LM
Efficacy	121LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	38°
Chipset	CREE CXB1507

ELECTRICAL

Voltage	36V
Milliamp / Current	180MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	RETROFIT
Construction	ALUMINIUM
Diameter	50 MM
Height	58 MM
Finish	WHITE
IP Rating	IP20
Lamp Base	GU10

LIGHT DISTRIBUTION

