

Ref:

SHOWERSPOT-FG-BL-9005-NL

Item No: SHOWER – 16678

orlight[®]
FROM SOURCE TO SITE

IP65 Shower Spot Fixture featuring die-cast Aluminium construction with double-tempered safety glass. This product incorporates a simple clip lamp change mechanism with removable fascia for ease of maintenance. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	66
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	84 MM
Height	42 MM
Cutout	72 MM
Weight	0.167KG
Tilt	FIXED
Finish	BLACK
RAL	RAL 9005
IP Rating	IP65
Compatible Light Source	GU10 / ENGINE
Lamp Change	CLIP MECHANISM


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

SHOWERPOT



FIXED

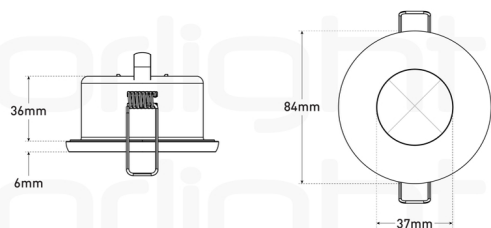


SHOWERSPOT-FG-BL-9005-NL

Item No: SHOWER – 16678

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

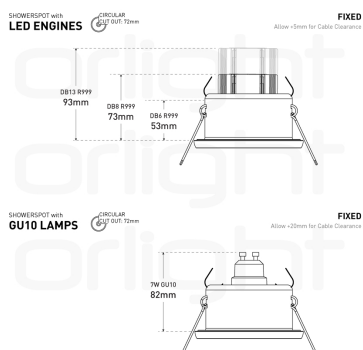

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999

SHOWERSPOT-FG-BL-9005-NL

Item No: SHOWER – 16678

orlight[®]
FROM SOURCE TO SITE

ACCESSORIES



MC1
11894
Standard Mains Converter



MC1-SL-WL
11901
Slim Spring Mains Converter for Orlight Classic,
Twist & Lock & Shower series.