

Ref:

APOLLO-SPOT2-21W-BL-3000K-DALI


Item No: APOLLO – 29297

orlight[®]
FROM SOURCE TO SITE

Track lighting system combining slim cylinder housing design with integral LED track adapter. Versatile range of motion to 90° on the vertical axis and 355° rotation allowing for direction of light to application. A single chipset ensures uniformity of the light beam. Interchangeable optics with 55° as standard and 20° and 35° as order only accessories. CRI >90 for light quality assurance, consistency is adhered to with a 2-Step MacAdams Ellipse binning strategy.



DIMENSIONS

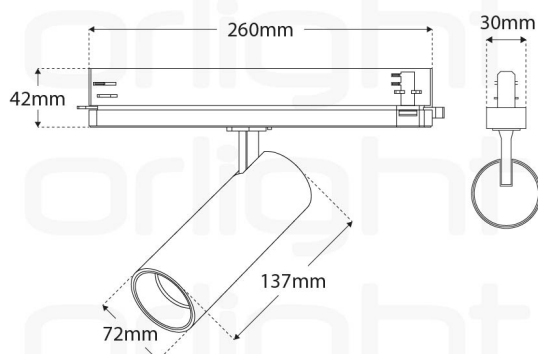

OPTICAL PERFORMANCE

Wattage	21W
Lumen Output	2457LM
Efficacy	117LM/W
CCT	3000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	55°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	500MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION




Installation	TRACK
Construction	ALUMINIUM
Diameter	72 MM
Length	137 MM
Tilt	90°
Rotation	355°
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20
Operating Ambient Temperature	-20°C - +35°C

APOLLO-SPOT2-21W-BL-3000K-DALI

Item No: APOLLO – 29297

orlight®
FROM SOURCE TO SITE


LIGHT DISTRIBUTION




COMPATIBLE DALI TRACKS



ORLTL-TRACK-BL-1M-DALI
15583
ORLTL DALI Track



ORLTL-TRACK-BL-2M-DALI
15585
ORLTL DALI Track



ORLTL-TRACK-BL-3M-DALI
15587
ORLTL DALI Track

ACCESSORIES



APOLLO-SPOT2-20DEG-LENS
30407
20 Degree Lens for Apollo Spot 2 Track Light



APOLLO-SPOT2-35DEG-LENS
30406
35-Degree Lens for Apollo Spot 2 Track Light



APOLLO-SPOT2-HC-MESH
30408
Honeycomb Mesh for Apollo Spot 2 Track Light