


Ref:

LEDG4LF-2700K


Item No: G4 – 11394

orlight[®]
FROM SOURCE TO SITE

LED G4 card with disperse light distribution. Suitable for 12V DC applications. Please be aware when replacing traditional capsule lamps, this product may not be compatible with existing transformers in your application.

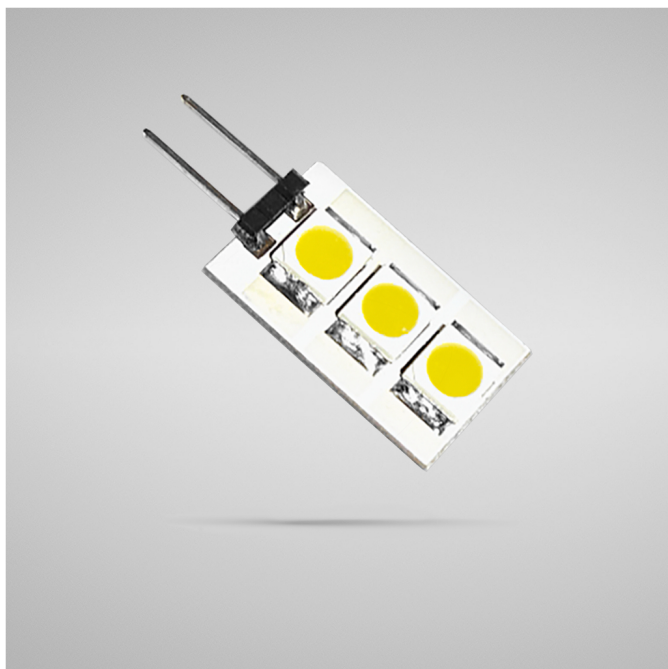

DIMENSIONS

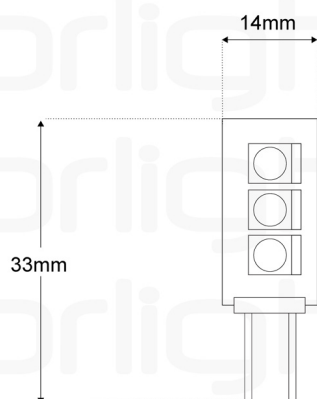

OPTICAL PERFORMANCE

Wattage	0.312W
Lumen Output	30LM
Efficacy	96LM/W
CCT	2700K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	SMD

ELECTRICAL

Constant Current or Voltage	CONSTANT VOLTAGE
Voltage	12V
Milliamp / Current	26MA
Driver Configuration	REMOTE


CONSTRUCTION

Installation	RETROFIT
Diameter	50 MM
Length	33 MM
Width / Depth	14 MM
IP Rating	IP20
Lamp Base	G4

LEDG4LF-2700K

Item No: G4 – 11394

LIGHT DISTRIBUTION



SWITCHED DRIVER



ORLRPV12-3
15182
12V Switched Driver

1-10V DRIVER



JOLLY-MINI-1-10V
11366
1-10V Driver