

Ref:

SASI2-1230-25W-4K-9010-DALI-B-EM

Item No: SASI – 30461

orlight[®]
FROM SOURCE TO SITE


Utilises high intensity LED's to achieve up to 137 lumens per circuit Watt with a CRI>80 for light quality assurance. Matte white finished Aluminium surround with PMMA diffuser. Product can be adjusted to fit within any ceiling grid. Compliant with DALI or 0-10V protocols. 3 hour emergency version available. Please Note: This product does not support hot plugging.



UGR
< 19

IP20

DIMENSIONS

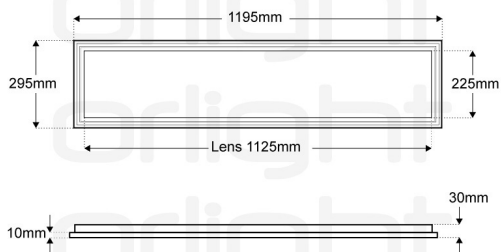

OPTICAL PERFORMANCE

Wattage	25W
Lumen Output	3375LM
Efficacy	135LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
UGR	UGR < 19
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	40-45V
Milliamp / Current	600MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	CEILING RECESSED
Construction	ALUMINIUM
Length	1195 MM
Width / Depth	295 MM
Height	30 MM
Diffuser	PMMA
Finish	WHITE
RAL	RAL 9010
IP Rating	IP20


EMERGENCY

Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	405LM

SASI2-1230-25W-4K-9010-DALI-B-EM

Item No: SASI – 30461

LIGHT DISTRIBUTION



SUSPENSION KIT



SUS-KIT-LOOP
17041
Suspension Kit Loop



SUS-KIT-PANEL-GP
17047
Suspension Kit Gripper