

Ref:

GRAFIK5-IP65-BL-BL-2700K-DALI-B-EM

Item No: GRAFIK – 30798


orlight[®]
FROM SOURCE TO SITE

Grafik 5 Pod IP65 is a recessed linear LED downlight, constructed from Aluminium and finished in Black. Available in a variety of colour temperatures and CRI>90, providing light quality assurance. Please Note: This product does not support hot plugging. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

RECTANGULAR
CUT OUT: 146 x 35MM

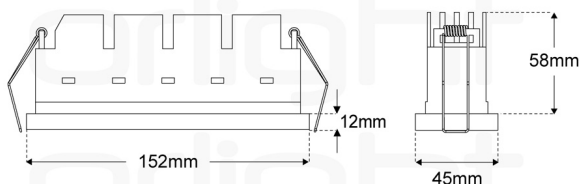

OPTICAL PERFORMANCE

Wattage	12W
Lumen Output	720LM
Efficacy	60LM/W
CCT	2700K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	40°
UGR	UGR < 19
Chipset	OSRAM LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	16V
Milliamp / Current	700MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Length	152 MM
Width / Depth	45 MM
Height	58 MM
Cutout	146 MM X 35 MM
Tilt	FIXED
Finish	BLACK
RAL	RAL 9005
IP Rating	IP65
Operating Ambient Temperature	-20°C - +35°C

EMERGENCY

Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	177LM

GRAFIK5-IP65-BL-BL-2700K-DALI-B-EM

Item No: GRAFIK – 30798



LIGHT DISTRIBUTION

