

Ref:

ORLEDBT-1200-9016-4K-DALI-B-EM


Item No: ORLEDBT – 17317

orlight[®]
FROM SOURCE TO SITE

Linear LED fitting featuring Aluminium construction finished in white RAL9016 and an opal diffuser. Integral LED driver with configurations to accommodate 1-10V, DALI and emergency options. This 4ft LED Luminaire can be surface mounted or suspended depending on the desired application.



DIMENSIONS

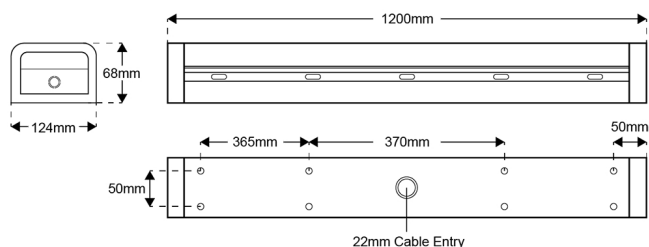

OPTICAL PERFORMANCE

Wattage	42W
Lumen Output	4074LM
Efficacy	97LM/W
CCT	4000K
CRI	CRI > 80
Beam Angle	120°
Chipset	SMD 2835 LED
Chip Life	L70 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	240V
Milliamp / Current	1000MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Length	1200 MM
Width / Depth	124 MM
Height	68 MM
Weight	2.2KG
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
IK Rating	IK08
Operating Ambient Temperature	-20°C - +45°C


EMERGENCY

Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	326LM

ORLLEDBT-1200-9016-4K-DALI-B-EM

Item No: ORLLEDBT – 17317

LIGHT DISTRIBUTION



SUSPENSION KIT



999-ORLALP018-R-SW
13781
Suspension Kit