

Ref:

ORL019MAXI-AW-NL

Item No: ORL019MAXI – 12796

orlight[®]
FROM SOURCE TO SITE

Architectural miniature downlight featuring an anti-glare baffle and minimal bezel. 70mm diameter for discreet installation with 360 Degree rotation and 35 Degree tilt facility. Clip lamp change mechanism with removable fascia for ease of maintenance. The fixture is available as IP20 & IP54. Please note this product is not suitable for use with conical fire hoods. Please contact the sales office for fire hood specification. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	68
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	70 MM
Height	50 MM
Cutout	63 MM
Weight	0.09KG
Tilt	35°
Rotation	360°
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP20
Compatible Light Source	GU10 / ENGINE
Lamp Change	REMOVAL OF FASCIA

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORL019MAXI-IP20

CIRCULAR
CUT OUT: 63mm

35° Tilt
ADJUSTABLE



ORL019MAXI-AW-NL


Item No: ORL019MAXI – 12796

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS


ORL019MAXI-IP20 with  **LED ENGINES** CIRCULAR CUT OUT: 63mm

ADJUSTABLE - 35° Tilt
Allow +5mm for Cable Clearance

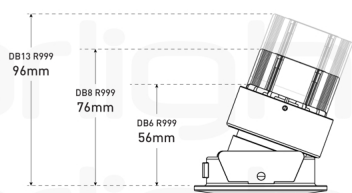

ORL019MAXI-IP20 with  **GU10 LAMPS** CIRCULAR CUT OUT: 63mm

ADJUSTABLE - 35° Tilt
Allow +20mm for Cable Clearance



COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999

ORL019MAXI-AW-NL

Item No: ORL019MAXI – 12796

orlight[®]
FROM SOURCE TO SITE



DB13-R999


ACCESSORIES



MC3
11924
Standard Mains Converter for ORL019MAXI



MC3-WL
11925
Standard Mains Converter for ORL019MAXI
with flex



LOUVRE-HC
11753
Honeycomb Louvre