


Ref:

ORLLED600-UGR-14W-4K-9016-DALI-B-EM

Item No: PANEL – 27733

orlight[®]
FROM SOURCE TO SITE


Orlight's 600x600 UGR solid state LED panel constructed from Aluminium with TPA V-0 compliant diffuser and finished in White RAL9016. Low energy solution for office and commercial applications. Offering benefits such as instant start, no flickering, silent running and no maintenance. Please Note: This product does not support hot plugging.

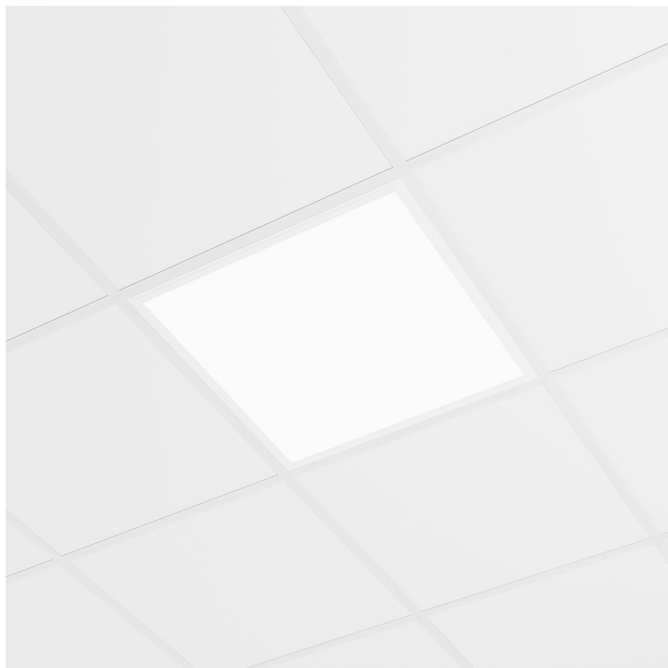

UGR
< 19

IP40

DIMENSIONS

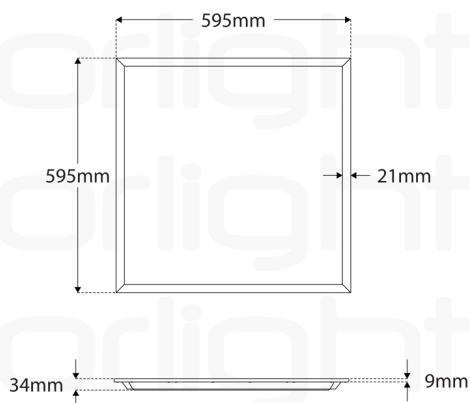

OPTICAL PERFORMANCE

Wattage	14W
Lumen Output	1708LM
Efficacy	122LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	90°
UGR	UGR < 19
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	240V
Milliamp / Current	350MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	CEILING RECESSED
Construction	ALUMINIUM
Length	595 MM
Width / Depth	595 MM
Height	34 MM
Diffuser	MICROPRISMATIC
Finish	WHITE
RAL	RAL 9016
IP Rating	IP40


EMERGENCY

Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	360LM


ORLLED600-UGR-14W-4K-9016-DALI-B-EM

Item No: PANEL – 27733

LIGHT DISTRIBUTION



SURFACE MOUNTING KIT



CEILING-CRADLE-6060-SMK-9016
17768
Cradle for LED Panel

SUSPENSION KIT



SUS-KIT-PANEL-GP
17047
Suspension Kit Gripper



SUS-KIT-LOOP
17041
Suspension Kit Loop