


Ref:

ORLLED-SL-6060-20W-3K-9016-DALIB-EM

Item No: PANEL-SL – 28580

orlight[®]
FROM SOURCE TO SITE


Thin trim LED panel offers a super slim 4mm trim, creating a near frameless light surface. White RAL-9016 finished Aluminium surrounded with quadraprism diffuser allows full V0 and UGR compliance. This luminaire can be recessed and suspended. Emergency options available. Please Note: This product does not support hot plugging.

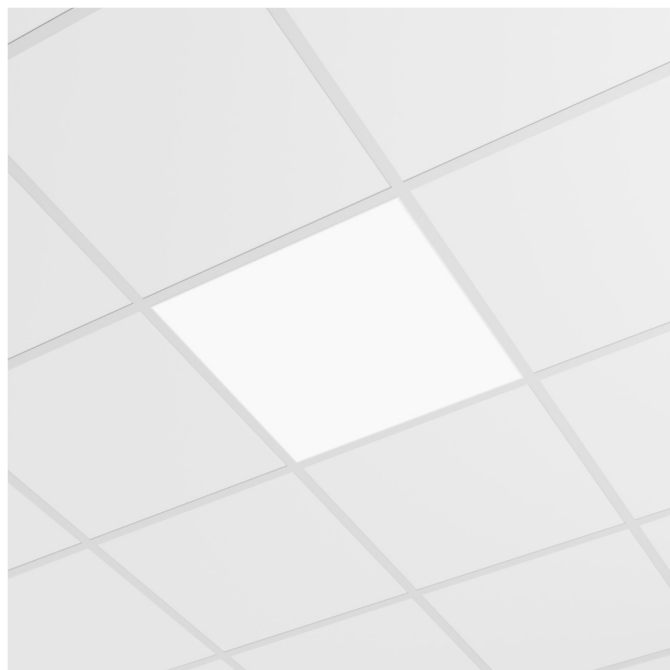

UGR
< 19

IP40

DIMENSIONS

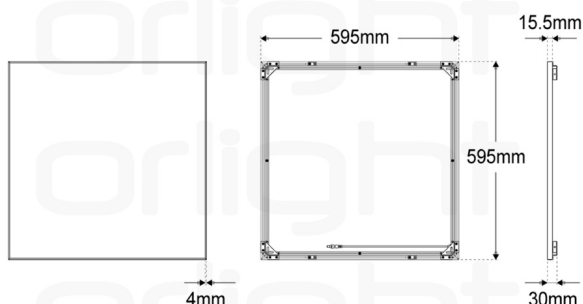

OPTICAL PERFORMANCE

Wattage	20W
Lumen Output	2480LM
Efficacy	124LM/W
CCT	3000K
CRI	CRI > 85
Binning	2 STEP MACADAMS
Beam Angle	90°
UGR	UGR < 19
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Milliamp / Current	500MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	CEILING RECESSED
Construction	ALUMINIUM
Length	595 MM
Width / Depth	595 MM
Height	15.5 MM
Weight	3.5KG
Diffuser	MICROPRISMATIC
Finish	WHITE
RAL	RAL 9016
IP Rating	IP40


EMERGENCY

Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	371LM


ORLLED-SL-6060-20W-3K-9016-DALIB-EM

Item No: PANEL-SL – 28580

LIGHT DISTRIBUTION



SURFACE MOUNTING KIT

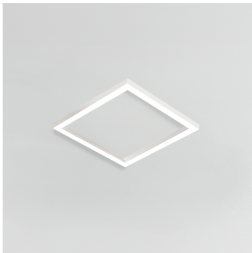

CEILING-CRADLE-6060-SMK-9016
17768
Cradle for LED Panel

SUSPENSION KIT



SUS-KIT-PANEL-GP
17047
Suspension Kit Gripper



SUS-KIT-LOOP
17041
Suspension Kit Loop