


Ref:

ORL-IRC-BN-3000K


Item No: 14700

orlight[®]
FROM SOURCE TO SITE

Stainless steel surface mounted wall light finished in Brushed Nickel with a glass opal diffuser. Constructed rated to IP44. Integral driver allows for easy installation.

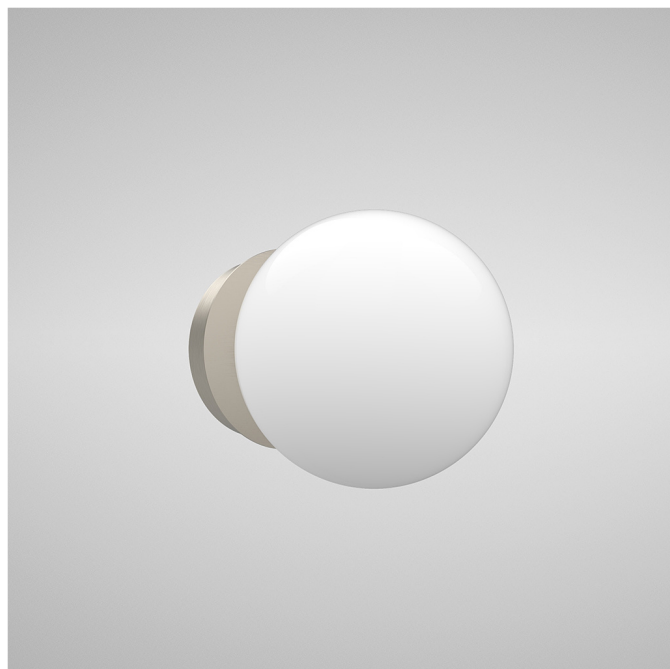

DIMENSIONS

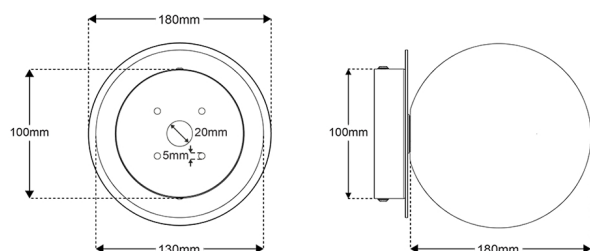

OPTICAL PERFORMANCE

Wattage	6W
Lumen Output	550LM
Efficacy	95LM/W
CCT	3000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Chipset	SMD CHIPSET

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-240V

CONSTRUCTION

Installation	WALL MOUNTED
Diameter	185 MM
Width / Depth	180 MM
Tilt	FIXED
Rotation	FIXED
Finish	BRUSHED NICKEL
IP Rating	IP44

ORL-IRC-BN-3000K

Item No: 14700

LIGHT DISTRIBUTION

