

Ref:

ORLCB-AW-9016-APL

Item No: ORLCB – 13994

orlight[®]
FROM SOURCE TO SITE

Recessed architectural downlight, with aluminium construction and coil spring fixing mechanism. Recessed light source serves to minimise glare and incorporates a 30° tilt capability. Orlight does not recommend cutting of holes prior to receipt of product in hand.



OPTICAL PERFORMANCE



LOR	82
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	70 MM
Height	56 MM
Cutout	67 MM
Tilt	30°
Rotation	360°
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP20
Compatible Light Source	LED ENGINE
Lamp Change	REMOVAL OF FIXTURE

DIMENSIONS

ADDITIONAL DIMENSIONS

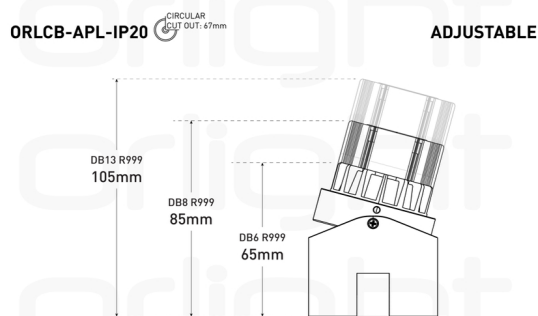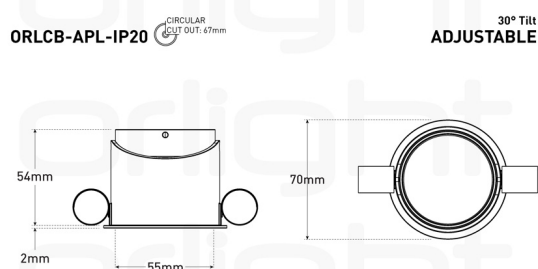

ORLCB-AW-9016-APL

Item No: ORLCB – 13994

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999




DB11-R999



DB13-R999

ACCESSORIES



LOUVRE-HC
11753
Honeycomb Louvre