

Ref:

# ORL2736-WH-LED


Item No: ORL2736 – 13504

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Recessed wall fixture featuring Aluminium construction with integrated 2W Cree XTE LED chipset providing a CRI value of >80 light quality assurance. Internal reflector creates a downward lighting effect. Polished Stainless Steel and Matt White faceplates available. Supplied complete with mounting box. Please Note: This product does not support hot plugging.



## DIMENSIONS

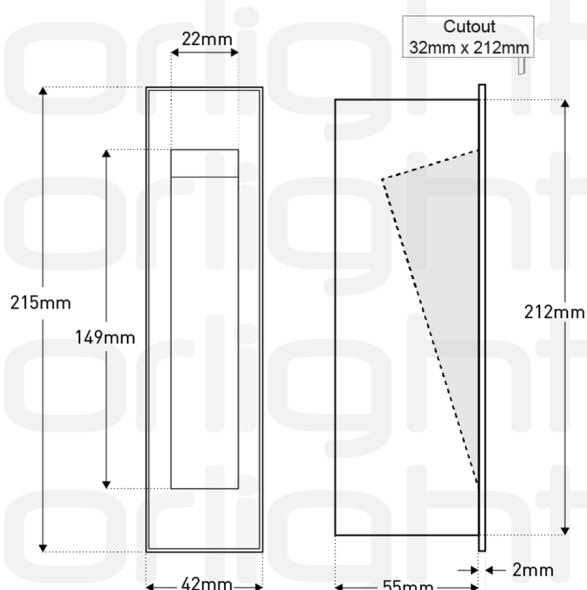

## OPTICAL PERFORMANCE

|              |          |
|--------------|----------|
| Wattage      | 2W       |
| Lumen Output | 180LM    |
| Efficacy     | 90LM/W   |
| CCT          | 3000K    |
| CRI          | CRI > 80 |
| Chipset      | CREE XTE |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT VOLTAGE |
| Voltage                     | 12V              |
| Driver Configuration        | REMOTE           |

## CONSTRUCTION

|               |               |
|---------------|---------------|
| Installation  | WALL RECESSED |
| Construction  | ALUMINIUM     |
| Width / Depth | 57 MM         |
| Height        | 215 MM        |
| Cutout        | 32 X 212 MM   |
| Finish        | WHITE         |
| IP Rating     | IP20          |


# ORL2736-WH-LED

Item No: ORL2736 – 13504

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## SWITCHED DRIVER

---



### ORLRPV1212

15174

12V Switched Driver

## MAINS DIMMABLE DRIVER

---



### JOLLY-1-10V

11363

1-10V Driver

## 1-10V DRIVER

---



### JOLLY-MINI-1-10V

11366

1-10V Driver

## DALI INTERFACE

---



### ORLDALIINTERFACE-12-24-36V

14054

DALI/PUSH Dimmable Interface