

Ref:

# ORL6736-4000K


Item No: CUBE – 13739

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Recessed feature fitting, vertically mounted and IP65 rated. The stepped louvre provides a soft downward emission of light. Integrated mains dimmable LED driver for ease of installation. Cast Aluminium face plate construction with Solid State CREE LED light source and CRI >80 to ensure light quality.



## DIMENSIONS

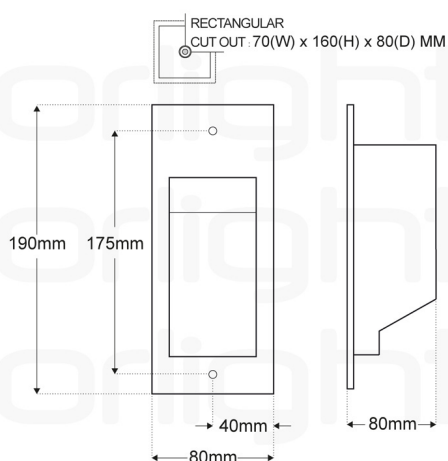

## OPTICAL PERFORMANCE

|              |                 |
|--------------|-----------------|
| Wattage      | 9W              |
| Lumen Output | 180LM           |
| Efficacy     | 21LM/W          |
| CCT          | 4000K           |
| CRI          | CRI > 80        |
| Binning      | 2 STEP MACADAMS |
| Beam Angle   | 100°            |
| Chipset      | CREE 5050       |
| Chip Life    | L70 > 60,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 220-240V         |
| Milliamp / Current          | 550MA            |
| Driver Configuration        | INTEGRAL         |
| Control                     | MAINS DIMMABLE   |

## CONSTRUCTION


|                               |                     |
|-------------------------------|---------------------|
| Installation                  | WALL RECESSED       |
| Construction                  | ALUMINIUM           |
| Length                        | 80 MM               |
| Width / Depth                 | 80 MM               |
| Height                        | 190 MM              |
| Cutout                        | 70 (W) X 160 (H) MM |
| Weight                        | 0.39KG              |
| Finish                        | GREY                |
| RAL                           | RAL 9023            |
| IP Rating                     | IP65                |
| Operating Ambient Temperature | -20°C - +50°C       |

# ORL6736-4000K

Item No: CUBE – 13739

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## LIGHT DISTRIBUTION



## FIXING DETAILS

