


Ref:

EZ2-231-22W-WH-4K-DALI-B-EM


Item No: EZENTIAL – 18324

orlight[®]
FROM SOURCE TO SITE

Ezential-2-231 Solid State fixture combines advanced thermal management with a 2835 SMD Samsung chipset for superior performance. Aluminium construction to IP54 with opal diffuser for glare reduction. Single chipset for beam uniformity, CRI>80 light quality. Available with 1-10V and DALI dimmable power supplies. Emergency Battery Pack - Integral. Please Note: This product does not support hot plugging. Orlight does not recommend cutting holes before product is received.

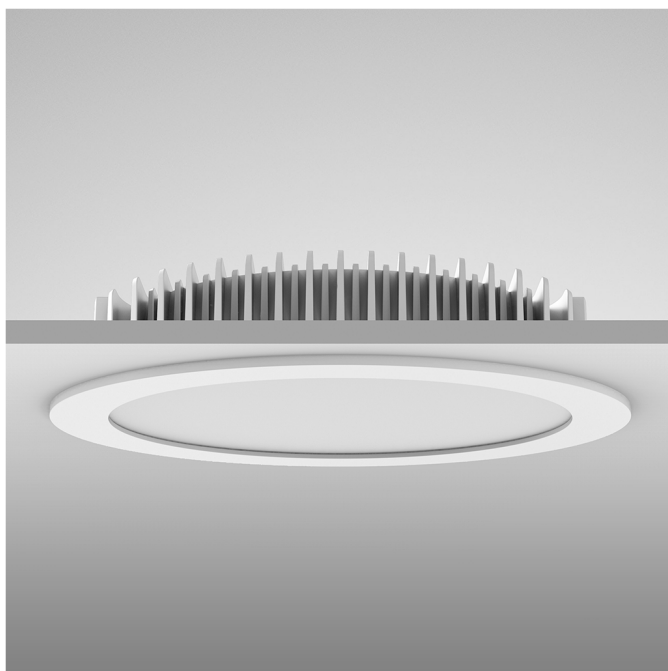

DIMENSIONS

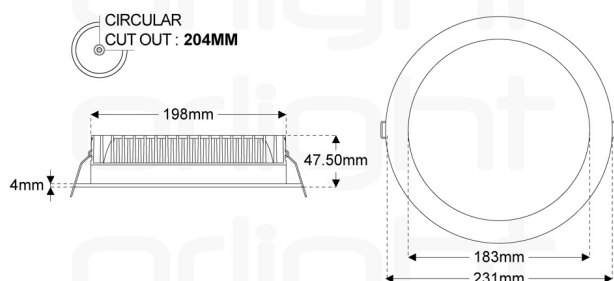

OPTICAL PERFORMANCE

Wattage	22W
Lumen Output	3366LM
Efficacy	153LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	115°
Chipset	SAMSUNG 2835 SMD
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	38-42V
Milliamp / Current	500MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	231 MM
Height	47.5 MM
Cutout	204 MM
Weight	0.98KG
Finish	WHITE
RAL	RAL 9016
IP Rating	IP54

EMERGENCY

Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	506LM

EZ2-231-22W-WH-4K-DALI-B-EM

Item No: EZENTIAL – 18324

orlight®
FROM SOURCE TO SITE

LIGHT DISTRIBUTION

