

Ref:

ULTRA-4-22W-WH-3K4K-DALI-B-EM

Item No: ULTRA LINEAR – 35453

orlight[®]
FROM SOURCE TO SITE

Our Ultra Linear fixtures feature UGR19-rated optics for comfortable, glare-free lighting, ideal for commercial environments. With easy-opening end caps for hassle-free installation and maintenance, these fixtures also offer switchable colour temperatures from 3000K to 4000K, providing flexible lighting options. Combining advanced optics and user-friendly design, these fixtures deliver superior functionality and quality.




UGR
< 19

SWITCHABLE
CCT

IP44

DIMENSIONS

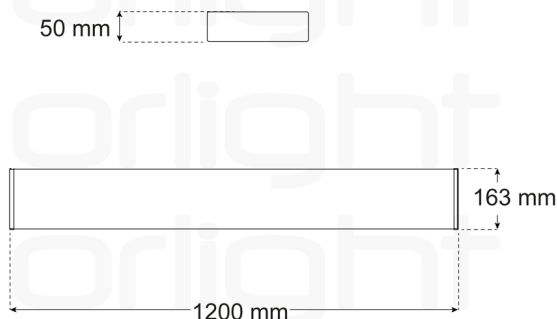

OPTICAL PERFORMANCE

Wattage	22W
Lumen Output	2772LM / 2904LM
Efficacy	126LM/W / 132LM/W
CCT	3000K/4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	90°
UGR	UGR < 19
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-240V
Milliamp / Current	250MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Length	1200 MM
Width / Depth	163 MM
Height	50 MM
Weight	2.94KG
Finish	WHITE
RAL	RAL 9003
IP Rating	IP44
IK Rating	IK06
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	416LM / 436LM

ULTRA-4-22W-WH-3K4K-DALI-B-EM

Item No: ULTRA LINEAR – 35453

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES



SUSPENSION KIT



ULTRA-SUS-KIT/ULTRA-L-SUS-KIT-1M

41236

Ultra Suspension Kit