

Ref:

SHIELD-320-WH-4K-DALI-B-EM


Item No: SHIELD – 35084

orlight[®]
FROM SOURCE TO SITE

Vandal resistant corner mount surface fixture, expertly crafted from durable sheet steel. This fixture boasts an exceptional IK10++ impact resistance rating, ensuring unparalleled durability. With an IP65 rating, this fixture provides superior protection against dust and water, making it suitable for indoor and outdoor covered applications.



DIMENSIONS

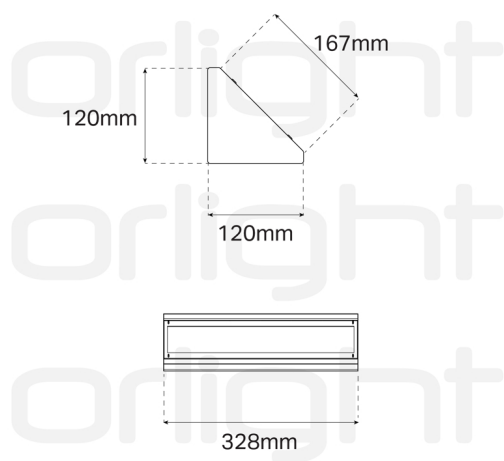

OPTICAL PERFORMANCE

Wattage	8W
Lumen Output	1032LM
Efficacy	129LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-240V
Milliamp / Current	200MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	SHEET STEEL
Length	328 MM
Width / Depth	120 MM
Height	120 MM
Finish	WHITE
RAL	RAL 9016
IP Rating	IP65
IK Rating	IK10++
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY


Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	391LM

SHIELD-320-WH-4K-DALI-B-EM

Item No: SHIELD – 35084

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES

