

Ref:

ORL11D-WH

Item No: ORL-D – 13183

orlight[®]
FROM SOURCE TO SITE

Die-Cast Aluminium recessed downlight incorporating tilt and rotate mechanism. The unit features a galvanised steel spring lamp retention system for ease of maintenance. Compatible with AR111 LED light sources. Performance criteria demonstrated in conjunction with Orlight MTG111 light source. Orlight does not recommend cutting of holes prior to receipt of product in hand.




ELECTRICAL

Voltage	36V
---------	-----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Length	206MM
Width / Depth	206 MM
Height	122 MM
Cutout	165 X 165 MM
Tilt	30°
Rotation	360°
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
Compatible Light Source	AR111
Lamp Change	CLIP MECHANISM

DIMENSIONS

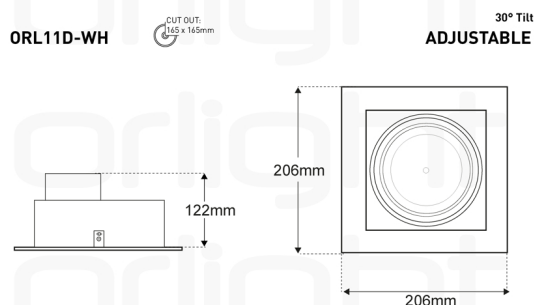

ORL11D-WH

Item No: ORL-D – 13183

orlight[®]
FROM SOURCE TO SITE

1-10V/DALI DRIVER



DALI-MINI-JOLLY-LC

10628

DALI Dimmable Intelligent Driver

COMPATIBLE LAMP



MTG111-3000K

11949

3000K, 200mA Constant Current Dimmable
Lamp



MTG111-5000K

11951

5000K, 200mA Constant Current Dimmable
Lamp