

Ref:

ORLRPVALUHS-S-2M

Item No: PROTRIM – 15290

orlight[®]
FROM SOURCE TO SITE

Standard square profile for Orlight Linear solutions. The profile features aluminium construction, ideal for heat dissipation. Diffuser designed to eliminate LED trail. Clip mechanism with 3M foam based adhesive for ease of installation.




OPTICAL PERFORMANCE

LOR	70
-----	----

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM & OPAL
Length	2000 MM
Width / Depth	21 MM
Height	20 MM
Finish	ALUMINIUM
IP Rating	IP20

DIMENSIONS

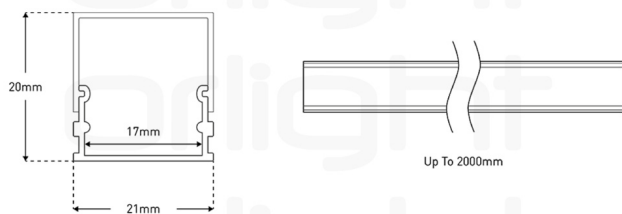

ORLRPVALUHS-S-2M

Item No: PROTRIM – 15290

orlight[®]
FROM SOURCE TO SITE

EVO



24V EVO CRI90

EVO4



IP RATED

ACCESSORIES



ORLRPVALUHS-S-CLOSED-EC
40010
Closed End Cap for ORLRPVALUHS-S



ORLRPVALUHS-S-OPEN-EC
40009
Open End Cap for ORLRPVALUHS-S