

Ref:

CENZO-BL-3000K-DALI


Item No: CENZO – 10458

orlight[®]
FROM SOURCE TO SITE

High power anti glare pendant constructed from Aluminium with a Steel shade, finished in either black or white. Surface mounted fixture with a separate driver required. CRI>90 to ensure light quality. Note: This product requires either a Switched or DALI driver. The DALI driver must be a remote type, suitable for a maximum of 1050mA. For a DALI driver, please see the accessory below.



DIMENSIONS

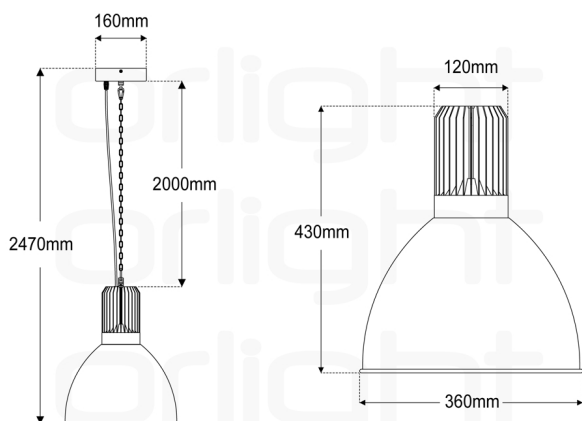

OPTICAL PERFORMANCE

Wattage	44W
Lumen Output	3168LM
Efficacy	72LM/W
CCT	3000K
CRI	CRI > 98
Binning	2 STEP MACADAMS
Beam Angle	23°
Chipset	CREE COB 2530
Chip Life	L70 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	32-42VDC
Milliamp / Current	1050MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SUSPENDED
Construction	ALUMINIUM & STEEL
Diameter	360 MM
Height	430 MM
Weight	2.95KG
Finish	BLACK
IP Rating	IP20
Operating Ambient Temperature	-20°C - +45°C

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	REMOTE

CENZO-BL-3000K-DALI


Item No: CENZO – 10458

orlight[®]
FROM SOURCE TO SITE


LIGHT DISTRIBUTION



FIXING DETAILS

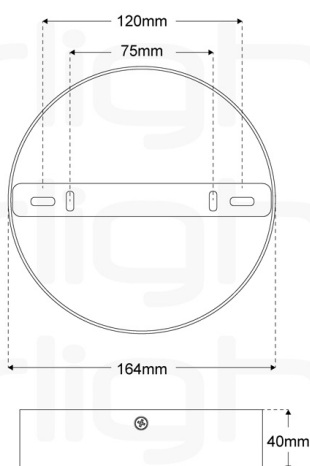

DALI DRIVER

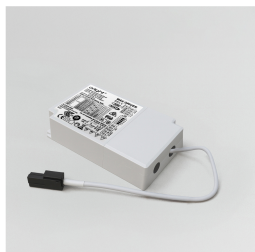

MAXDR650-1100MA
11886
1-10V/DALI & Push Dimming Driver