

Ref:

ORL2736-CH-LED


Item No: ORL2736 – 13500

orlight[®]
FROM SOURCE TO SITE

Recessed wall fixture featuring Aluminium construction with integrated 2W Cree XTE LED chipset providing a CRI value of >80 light quality assurance. Internal reflector creates a downward lighting effect. Polished Stainless Steel and Matt White faceplates available. Supplied complete with mounting box. Please Note: This product does not support hot plugging.



DIMENSIONS

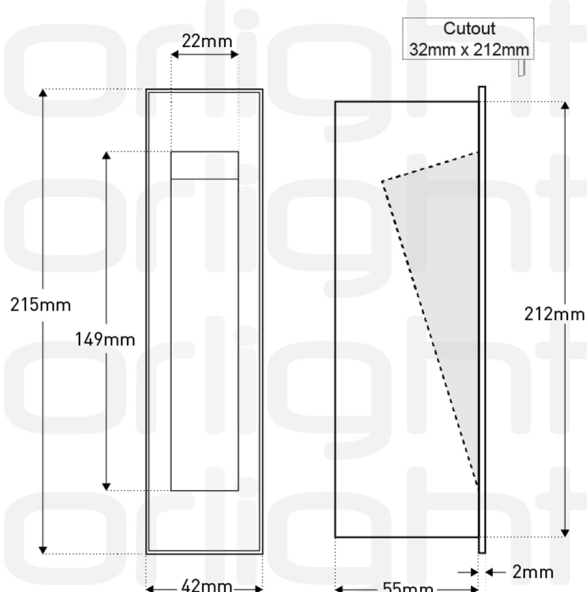

OPTICAL PERFORMANCE

Wattage	2W
Lumen Output	180LM
Efficacy	90LM/W
CCT	3000K
CRI	CRI > 80
Chipset	CREE XTE

ELECTRICAL

Constant Current or Voltage	CONSTANT VOLTAGE
Voltage	12V
Driver Configuration	REMOTE

CONSTRUCTION


Installation	WALL RECESSED
Construction	ALUMINIUM
Width / Depth	57 MM
Height	215 MM
Cutout	32 X 212 MM
Finish	CHROME
IP Rating	IP20

ORL2736-CH-LED

Item No: ORL2736 – 13500

orlight[®]
FROM SOURCE TO SITE

SWITCHED DRIVER



ORLRPV1212

15174

12V Switched Driver

MAINS DIMMABLE DRIVER



JOLLY-1-10V

11363

1-10V Driver

1-10V DRIVER



JOLLY-MINI-1-10V

11366

1-10V Driver

DALI INTERFACE



ORLDALIINTERFACE-12-24-36V

14054

DALI/PUSH Dimmable Interface