

Ref:

ORLEDBAR-3000K-900MM


Item No: LEDBAR – 14823

orlight[®]
FROM SOURCE TO SITE

Solid state linear bar with integrated CRI90+ Luxeon chipset. 20 degree optic as standard for light projection. Aluminium construction rated to IP65, suitable for exterior applications. Supplied with optional mounting clips allowing for the fixture to be angled. Please Note: This product does not support hot plugging.



DIMENSIONS

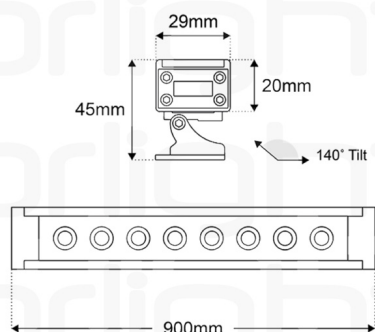

OPTICAL PERFORMANCE

Wattage	17W
Lumen Output	1396LM
Efficacy	82LM/W
CCT	3000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	20°
Chipset	LUXEON 3030 2D

ELECTRICAL

Voltage	24V
Driver Configuration	REMOTE


CONSTRUCTION

Installation	SURFACE MOUNTED
Construction	ALUMINIUM
Length	900 MM
Width / Depth	29 MM
Height	45 MM
Tilt	ADJUSTABLE
Finish	ALUMINIUM
IP Rating	IP65


ORLEDBAR-3000K-900MM

Item No: LEDBAR – 14823

LIGHT DISTRIBUTION



FIXING DETAILS

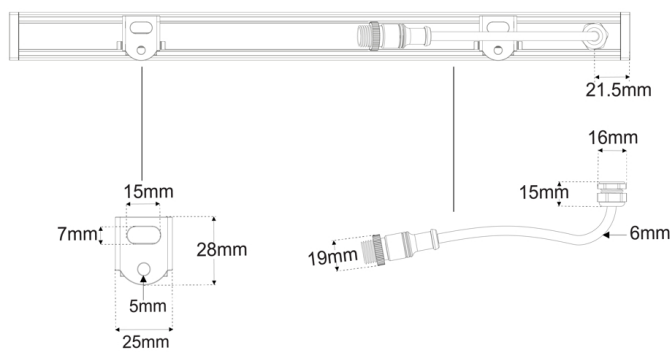

POWER SUPPLY



ORLRPV2460
15214
24V Switched Driver



ORLRPV2435
15210
24V Switched Driver



ORLRPV24150
15203
24V Switched Driver



ORLRPV24100
15199
24V Switched Driver

ORLEDBAR-3000K-900MM

Item No: LEDBAR – 14823

orlight[®]
FROM SOURCE TO SITE

MAINS DIMMABLE



ORLRPV50-24MD

15250

24V Mains Dimmable Driver



ORLRPV25-24MD

15221

24V Mains Dimmable Driver



ORLRPV100-24MD

15169

24V Mains Dimmable Driver

1-10V/DALI INTERFACE



ORLRPV-INTERFACE-MINI

15357

Constant Voltage Interface for 1-10V dimming




ORLDALIINTERFACE-12-24-36V

14054

DALI/PUSH Dimmable Interface

ACCESSORIES



ORLEDBAR-LVR-900MM

14827

Louvre for LEDBAR Range