

Ref:

SIREN-9010-3000K


Item No: SIREN – 16775

orlight[®]
FROM SOURCE TO SITE

Switched exterior cylindrical ceiling light. White housing with a thick, partially frosted crystal glass diffuser creating a high level of visual comfort.



DIMENSIONS

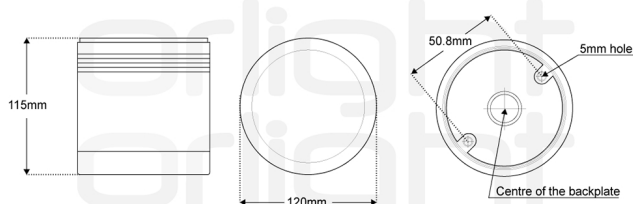

OPTICAL PERFORMANCE

Wattage	10W
Lumen Output	887LM
Efficacy	88/LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	CREE COB LED
Chip Life	L70 > 55,400HRS

ELECTRICAL

Voltage	AC200-240V
Driver Configuration	INTEGRAL
Control	SWITCHED

CONSTRUCTION

Installation	SURFACE MOUNTED
Construction	ALUMINIUM & GLASS
Diameter	120 MM
Height	115 MM
Weight	1.6KG
Finish	WHITE
RAL	RAL 9010
IP Rating	IP54
IK Rating	IK09
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY

Emergency Configuration	REMOTE
-------------------------	--------

SIREN-9010-3000K

Item No: SIREN – 16775

LIGHT DISTRIBUTION

