

Ref:

NEBULADQSUS-DUO-WH-39W-4K-EM


Item No: NEBULA SUSPENDED – 29160

orlight[®]
FROM SOURCE TO SITE

NEBULADQ-SUS-DUO-200 is a UGR<19, suspended downlight constructed from Aluminium which provides up and down directional light distribution. This downlight features a high lumen output and CRI>85 for light quality assurance. The product is supplied with a 60° optic as standard. Emergency option available.



DIMENSIONS

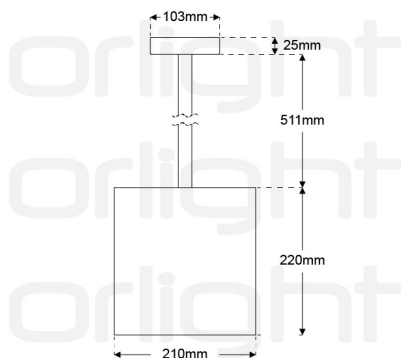

OPTICAL PERFORMANCE

Wattage	39W
Lumen Output	4836LM
Efficacy	124LM/W
CCT	4000K
CRI	CRI > 85
Binning	2 STEP MACADAMS
Beam Angle	60°
UGR	UGR < 19
Chipset	CITIZEN LED CHIPSET
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	↓ 700MA ↑ 300MA
Driver Configuration	INTEGRAL
Control	SWITCHED

CONSTRUCTION

Installation	SUSPENDED
Construction	ALUMINIUM
Diameter	210 MM
Width / Depth	220 MM
Height	756 MM
Tilt	FIXED
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
Operating Ambient Temperature	-20°C - +35°C

EMERGENCY

Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	283LM DOWN ONLY

NEBULADQSUS-DUO-WH-39W-4K-EM

Item No: NEBULA SUSPENDED – 29160

orlight®
FROM SOURCE TO SITE

LIGHT DISTRIBUTION

