

Ref:

ORLCB-FX-BL-9005

Item No: ORLCB – 14006

orlight[®]
FROM SOURCE TO SITE

Trimless architectural downlight, with aluminium construction and clip-in fixing mechanism. Recessed light source serves to minimise glare. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	82
-----	----

CONSTRUCTION


Installation	RECESSED TRIMLESS
Construction	ALUMINIUM
Diameter	60 MM
Height	48 MM
Cutout	75 MM
Tilt	FIXED
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20
Compatible Light Source	LED ENGINE
Lamp Change	CLIP MECHANISM

ADDITIONAL DIMENSIONS

ORLCB-FX-IP20



FIXED

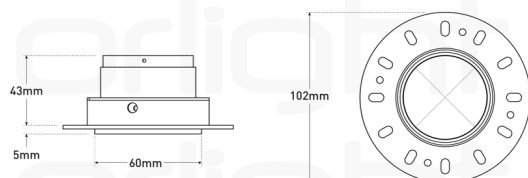


ORLCB-FX-IP20 with
LED ENGINES



FIXED

Allow +5mm for Cable Clearance

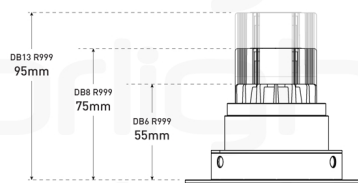

ORLCB-FX-BL-9005

Item No: ORLCB – 14006

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999




DB11-R999



DB13-R999

ACCESSORIES



LOUVRE-HC
11753
Honeycomb Louvre