

Ref:

ORL009-TLSV-CL-9005-NL

Item No: ORL009 – 33891

orlight[®]
FROM SOURCE TO SITE

Directional architectural miniature downlight featuring an anti-glare baffle and minimal bezel. 72 mm diameter for discreet installation with 30° tilt capability. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	58
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	72 MM
Height	52 MM
Cutout	64 MM
Weight	0.07KG
Tilt	30°
Rotation	360°
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20
Compatible Light Source	LED ENGINE
Lamp Change	REMOVAL OF FIXTURE



EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORL009-TLSV-IP20

CIRCULAR
CUT OUT: 64mm


30° Tilt
ADJUSTABLE



ORL009-TLSV-CL-9005-NL

Item No: ORL009 – 33891

ADDITIONAL DIMENSIONS

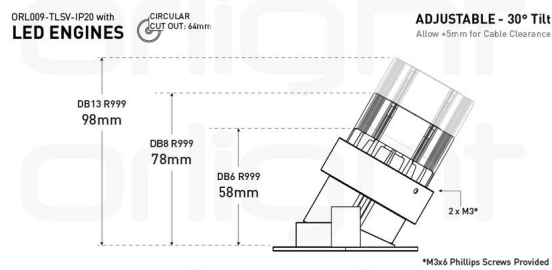

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999




DB13-R999

ORL009-TLSV-CL-9005-NL

Item No: ORL009 – 33891

orlight[®]
FROM SOURCE TO SITE

ACCESSORIES



LOUVRE-HC
11753
Honeycomb Louvre