

Ref:

ORLLH-40W-BL-3000K


Item No: LUCID – 14878

orlight[®]
FROM SOURCE TO SITE

Streetscape fixture featuring Aluminium construction to IP65 finished with Epoxy Power Coat to RAL9004. Integrated Bridgelux LED chipset with Meanwell Power Supply unit. Bi-Pole downward light emission with PMMA optic to 120 degrees. Available with 3m, 4m, 5m and 6m poles.



DIMENSIONS

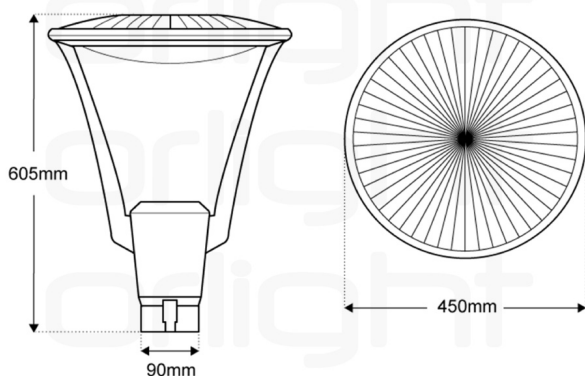

OPTICAL PERFORMANCE

Wattage	40W
Lumen Output	3600LM
Efficacy	90LM/W
CCT	3000K
CRI	CRI > 70
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	BRIDGELUX CHIPSET
Chip Life	L70 > 60,000HRS

ELECTRICAL

Voltage	230V
Driver Configuration	INTEGRAL
Control	SWITCHED


CONSTRUCTION

Construction	ALUMINIUM
Diameter	450 MM
Height	605 MM
Weight	7.5KG
Finish	BLACK
RAL	RAL 9004
IP Rating	IP65

ORLLH-40W-BL-3000K

Item No: LUCID – 14878

LIGHT DISTRIBUTION



FLANGE MOUNT LAMP POST



ORLLAMPPOST-4M-FM
14727
Galvanised Steel Tubular Lighting Columns



ORLLAMPPOST-4M-FM-9004
14728
Galvanised Steel Tubular Lighting Columns



ORLLAMPPOST-3M-FM
21737
Galvanised Steel Tubular Lighting Columns



ORLLAMPPOST-6M-FM
21738
Galvanised Steel Tubular Lighting Columns




ORLLAMPPOST-BL-FM-5M
28384
Galvanised Steel Tubular Lighting Columns




ORLLAMPPOST-FM-5M
28385
Galvanised Steel Tubular Lighting Columns

ROOT MOUNT LAMP POST




ORLLAMPPOST-5M-RM
14731
Galvanised Steel Tubular Lighting Columns



ORLLAMPPOST-8M-RM
14733
Galvanised Steel Tubular Lighting Columns



ORLLAMPPOST-BL-8M-RM
14737
Galvanised Steel Tubular Lighting Columns



ORLLAMPPOST-RM-4M
14740
Galvanised Steel Tubular Lighting Columns