

Ref:

ORLLH353-50W-BL-4000K


Item No: LUMINA – 14876

orlight[®]
FROM SOURCE TO SITE

Streetscape fixture featuring Aluminium construction to IP66 finished with Epoxy Power Coat to RAL9004. Suitable for use in combination with up to 4M mounting post.



DIMENSIONS

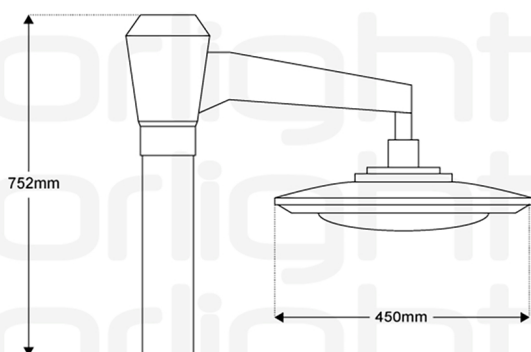

OPTICAL PERFORMANCE

Wattage	50W
Lumen Output	4720LM
Efficacy	94LM/W
CCT	4000K
CRI	CRI > 65
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	BRIDGELUX CHIPSET
Chip Life	L70 > 60,000HRS

ELECTRICAL

Voltage	100-240V AC
Driver Configuration	INTEGRAL
Control	SWITCHED

CONSTRUCTION


Construction	ALUMINIUM
Diameter	450 MM
Length	752 MM
Height	249 MM
Finish	BLACK
RAL	RAL 9004
IP Rating	IP66

ORLLH353-50W-BL-4000K


Item No: LUMINA – 14876

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL DIMENSIONS

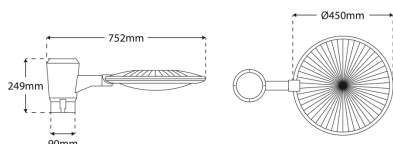

FLANGE MOUNT LAMP POST



ORLLAMPPOST-4M-FM
14727
Galvanised Steel Tubular Lighting Columns



ORLLAMPPOST-4M-FM-9004
14728
Galvanised Steel Tubular Lighting Columns



ORLLAMPPOST-3M-FM
21737
Galvanised Steel Tubular Lighting Columns



ORLLAMPPOST-6M-FM
21738
Galvanised Steel Tubular Lighting Columns



ORLLAMPPOST-BL-FM-5M
28384
Galvanised Steel Tubular Lighting Columns




ORLLAMPPOST-FM-5M
28385
Galvanised Steel Tubular Lighting Columns


ORLLH353-50W-BL-4000K

Item No: LUMINA – 14876

ROOT MOUNT LAMP POST



ORLLAMPPOST-5M-RM
14731
Galvanised Steel Tubular Lighting Columns



ORLLAMPPOST-8M-RM
14733
Galvanised Steel Tubular Lighting Columns



ORLLAMPPOST-BL-8M-RM
14737
Galvanised Steel Tubular Lighting Columns



ORLLAMPPOST-RM-4M
14740
Galvanised Steel Tubular Lighting Columns