

Ref:

ORL009-TLSV-CL-BL-9005-IP44


Item No: ORL009 – 43541

orlight[®]
FROM SOURCE TO SITE

Directional architectural miniature downlight featuring an anti-glare baffle and minimal bezel. 72mm diameter for discreet installation with 30° tilt capability. This downlight has been independently tested and certified for 90-minute fire resistance in solid joist constructions when used with our Diablo LED engines. View the full fire test report [here](#). Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

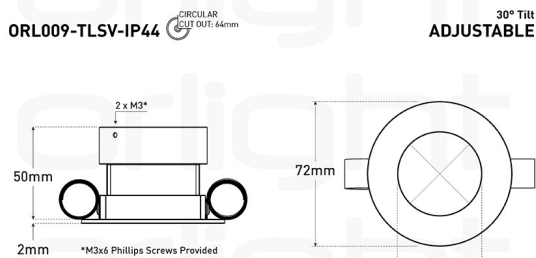

OPTICAL PERFORMANCE

LOR	52
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	72 MM
Height	52 MM
Cutout	64 MM
Weight	0.07KG
Tilt	30°
Rotation	360°
Finish	BLACK
RAL	RAL 9005
IP Rating	IP44
Fire Rated	YES
Fire Rating	90 MINS - SOLID JOIST
Fire Rated With	DIABLO RETROFIT ENGINE
Fire Test Report	424737
Compatible Light Source	LED ENGINE
Lamp Change	REMOVAL OF FIXTURE

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORL009-TLSV-CL-BL-9005-IP44

Item No: ORL009 – 43541

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

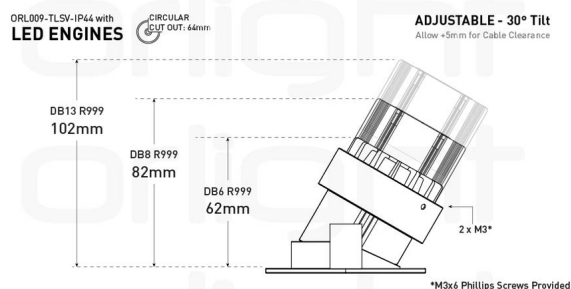

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999




DB13-R999

ORL009-TLSV-CL-BL-9005-IP44

Item No: ORL009 – 43541

orlight[®]
FROM SOURCE TO SITE

ACCESSORIES



LOUVRE-HC
11753
Honeycomb Louvre