

Ref:

AQUASPOT-FG-WH-9010-NL

Item No: AQUA – 33634

orlight
FROM SOURCE TO SITE

Architectural downlight featuring an anti-glare baffle and recessed light source to minimise glare. Discreet application with reduced trim bezel. Construction rated to IP65 incorporating a frosted internal diffuser. This downlight has been independently tested and certified for 90-minute fire resistance in solid joist constructions when used with our Diablo LED engines. View the full fire test report [here](#). Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	76
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	80 MM
Height	33 MM
Cutout	72 MM
Weight	0.09KG
Tilt	FIXED
Finish	WHITE
RAL	RAL 9010
IP Rating	IP65
Fire Rated	YES
Fire Rating	90 MINS - SOLID JOIST
Fire Rated With	DIABLO RETROFIT ENGINE
Fire Test Report	424737
Compatible Light Source	GU10 / ENGINE
Lamp Change	REMOVAL OF FIXTURE


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

AQUASPOT

CIRCULAR
CUT OUT: 72mm

FIXED

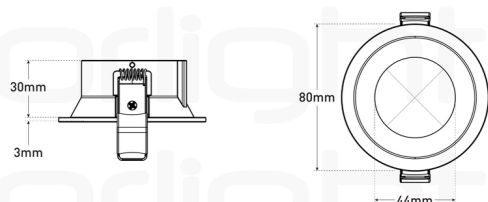


AQUASPOT-FG-WH-9010-NL

Item No: AQUA – 33634


orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

AQUASPOT with **LED ENGINES**  **CIRCULAR CUT OUT: 72mm** **FIXED**
Allow +5mm for Cable Clearance

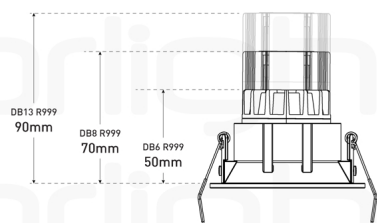

AQUASPOT with **GU10 LAMPS**  **CIRCULAR CUT OUT: 72mm** **FIXED**
Allow +20mm for Cable Clearance



COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999

AQUASPOT-FG-WH-9010-NL

Item No: AQUA – 33634

orlight[®]
FROM SOURCE TO SITE



DB13-R999

ACCESSORIES



MC2-SL-WL

11912
Slim Spring Mains Converter for Orlight
Magnetic series with flex



MC2-SL

11911
Slim Spring Mains Converter for Orlight
Magnetic series