

Ref:

# ORLWP2-2-20W-LED-EM

Item No: WEATHERPRO – 30511


**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Orlight IP66 rated LED weather packs are ideal for back of house areas, car parks, storage areas, warehousing, under canopy, walkways and general industrial use. Featuring a high efficacy LED card, body and diffuser constructed from injection moulded Polycarbonate. Supplied with stainless steel clips for added durability. Do not connect the battery supply until the 220/240V A.C. supply is permanently fed. Allow 24 hours of charge before running the lamp in emergency mode.



## DIMENSIONS

**ORLWP2**  
2FT SOLID STATE

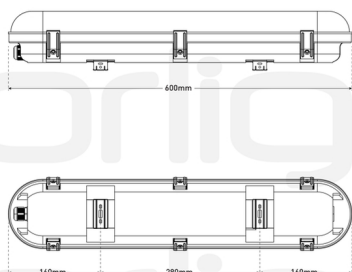

## OPTICAL PERFORMANCE

|                      |                  |
|----------------------|------------------|
| Wattage              | 20W              |
| Lumen Output         | 2760LM           |
| Efficacy             | 138LM/W          |
| CCT                  | 4000K            |
| CRI                  | CRI > 80         |
| Binning              | 2 STEP MACADAMS  |
| Beam Angle           | 120°             |
| Chipset              | ORLIGHT LED      |
| Calculated Chip Life | L70 > 105,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 240V             |
| Milliamp / Current          | 500MA            |
| Driver Configuration        | INTEGRAL         |
| Control                     | SWITCHED         |

## CONSTRUCTION

|                               |                 |
|-------------------------------|-----------------|
| Installation                  | SURFACE         |
| Construction                  | POLYCARBONATE   |
| Length                        | 600 MM          |
| Width / Depth                 | 125 MM          |
| Height                        | 90 MM           |
| Weight                        | 1.36KG          |
| Finish                        | GREY            |
| IP Rating                     | IP66            |
| IK Rating                     | IK08            |
| Operating Ambient Temperature | -40°C - +65°C   |
| Lamp Change                   | SOLID STATE LED |

## EMERGENCY


|                         |                |
|-------------------------|----------------|
| Emergency               | YES            |
| Emergency Configuration | INTEGRAL       |
| Emergency Duration      | EMERGENCY 3HRS |
| EM Lumen                | 500LM          |

# ORLWP2-2-20W-LED-EM

Item No: WEATHERPRO – 30511

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## LIGHT DISTRIBUTION



## ADDITIONAL PRODUCT IMAGES



## SUSPENSION KIT



### SUS-KIT-M6-MALE

17044

M6 Angel Hanger