

Ref:

TITAN-700-BL-3000K


Item No: TITAN – 42516

orlight[®]
FROM SOURCE TO SITE

Architectural exterior bollard, stocked in standard as Black 9005



DIMENSIONS

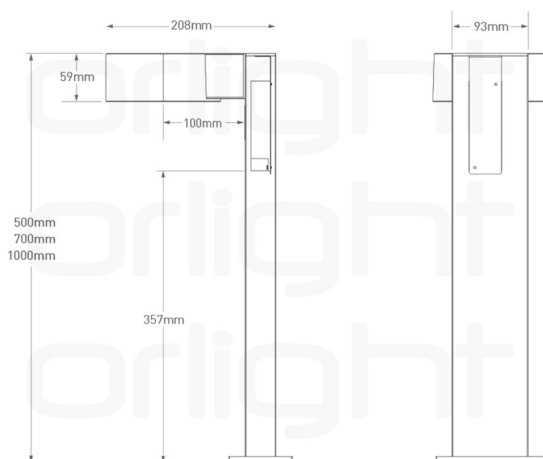

OPTICAL PERFORMANCE

Wattage	8W
Lumen Output	600LM
Efficacy	77LM/W
CCT	3000K
CRI	CRI > 80
Beam Angle	120°
Chipset	2835 SMD
Chip Life	L70 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	200-240V
Milliamp / Current	200MA
Driver Configuration	INTEGRAL

CONSTRUCTION


Installation	SURFACE MOUNTED
Construction	ALUMINIUM
Width / Depth	208 MM
Height	700 MM
Weight	2.5KG
Finish	BLACK
RAL	RAL 9005
IP Rating	IP65
IK Rating	IK10
Operating Ambient Temperature	-20°C - +45°C

TITAN-700-BL-3000K

Item No: TITAN – 42516

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES

