

Ref:

ORLLED-SL-1230-20W-4K-9016-DALI

Item No: PANEL-SL – 28660

orlight[®]
FROM SOURCE TO SITE


This 1195 x 295 LED panel offers a super slim 4mm trim, creating a near frameless light surface. White RAL-9016 finished Aluminium surrounded with quadraprism diffuser full V0 and UGR compliance. This luminaire can be recessed and suspended. Please Note: This product does not support hot plugging.



UGR
< 19

IP40

DIMENSIONS

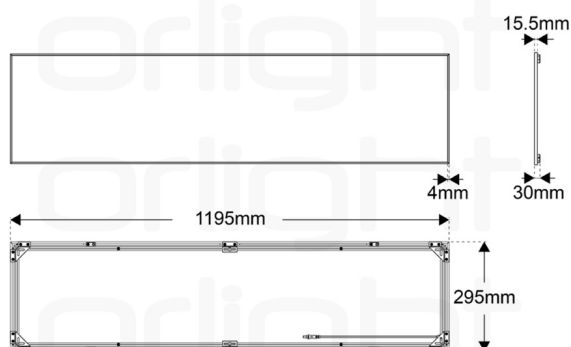

OPTICAL PERFORMANCE

Wattage	20W
Lumen Output	2680LM
Efficacy	134LM/W
CCT	4000K
CRI	CRI > 85
Binning	2 STEP MACADAMS
Beam Angle	90°
UGR	UGR < 19
Chipset	SAMSUNG LED
Chip Life	L70 > 54,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Milliamp / Current	500MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	CEILING RECESSED
Construction	ALUMINIUM
Length	1195 MM
Width / Depth	295 MM
Height	15.5 MM
Weight	4KG
Diffuser	MICROPRISMATIC
Finish	WHITE
RAL	RAL 9016
IP Rating	IP40


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORLLED-SL-1230-20W-4K-9016-DALI

Item No: PANEL-SL – 28660

LIGHT DISTRIBUTION



SUSPENSION KIT



SUS-KIT-PANEL-SCREW
17048
Suspension Kit Screws



SUS-KIT-M4-MALE
17042
M4 Angel Hanger