


Ref:

ORL2734-FL-IP65-BL-2700K


Item No: ORL2734-FL – 13476

orlight[®]
FROM SOURCE TO SITE

Designer recessed wall fixture with Matt White, Matt Black or Aluminium Finish. Internal reflector creates downward lighting effect. Performance criteria demonstrated in conjunction with CREE X-PE2 LED Chipset. Metal mounting back box accessory available for external applications. (ORL-2734-FL-BACKBOX). Please Note: This product does not support hot plugging.

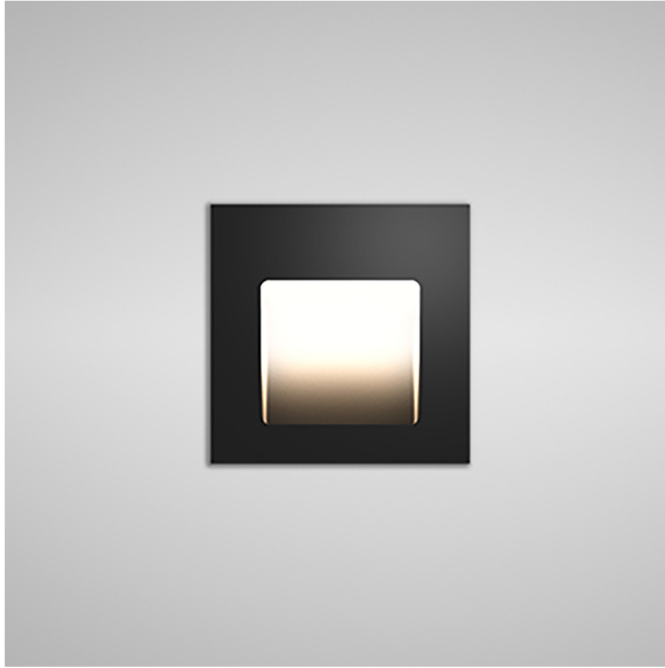

DIMENSIONS

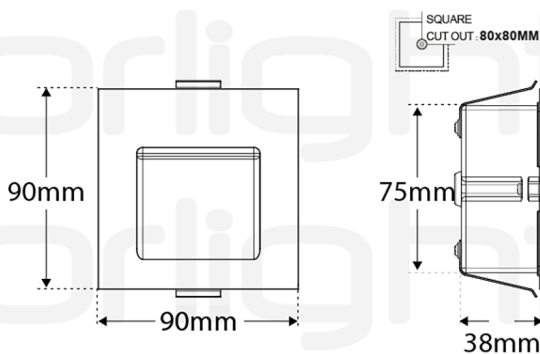

OPTICAL PERFORMANCE

Wattage	4W
Lumen Output	99LM
Efficacy	25LM/W
CCT	2700K
CRI	CRI > 80
Chipset	CREE XPE2

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	9V
Milliamp / Current	350MA
Driver Configuration	REMOTE


CONSTRUCTION

Installation	WALL RECESSED
Construction	ALUMINIUM
Length	90 MM
Width / Depth	38 MM
Height	90 MM
Cutout	80 X 80 MM
Weight	0.537KG
Finish	BLACK
RAL	RAL 9005
IP Rating	IP65

ORL2734-FL-IP65-BL-2700K

Item No: ORL2734-FL – 13476


LIGHT DISTRIBUTION



DRIVER CONFIGURATION


CONTROL	IP RATING	DRIVER	CODE	MIN. FITTING	MAX. FITTING
Switched	IP68	ORLRPV350CC	15231	1	3
Switched	IP42	ORLRPV350-35-APC	15230	4	10
Switched	IP66	ORLRPV350-35-APC-IP66	31555	4	10
Mains	IP20	ORLRPV20D-350MA	46595	1	4
1-10V/Push	IP20	MAXDR-MINI-350MA	22251	1	5
DALI	IP20	ORL-DALI-NFC-15CC-350MA	34715	1	4

SWITCHED (IP42)



ORLRPV350-35-APC
15230
Constant current 350mA Driver

SWITCHED (IP66)



ORLRPV350-35-APC-IP66
31555
Constant current 350mA Driver

ORL2734-FL-IP65-BL-2700K

Item No: ORL2734-FL – 13476

orlight[®]
FROM SOURCE TO SITE

SWITCHED (IP68)



ORLRPV350CC

15231

Constant current 350mA Driver

MAINS (IP20)



ORLRPV20D-350MA

46595

Mains Dimmable Driver

1-10V/PUSH DIM (IP20)



MAXDR-MINI-350MA

22251

Mini 1-10V/DALI & Push Dimming Driver

DALI (IP20)



ORL-DALI-NFC-15CC-350MA

34715

NFC Programmable 15W CC 350mA DALI
Driver

ORL2734-FL-IP65-BL-2700K

Item No: ORL2734-FL – 13476

orlight[®]
FROM SOURCE TO SITE

BACKBOX



ORL2734-FL-BACKBOX

13469

Back for ORL2734-FL