

Ref:

ORLRPVALUHS-TP7-2M

Item No: PROTRIM – 15322

orlight[®]
FROM SOURCE TO SITE

Only 7mm deep, this profile produces a wide spread of light within a minimal space with frosted diffuser to eliminate LED trail. Can be surface mounted or recessed. Aluminium construction for efficient heat dissipation. 3M foam adhesive for ease of installation. Optional adjustable tilt bracket available.




DIMENSIONS

OPTICAL PERFORMANCE

LOR	70
-----	----

CONSTRUCTION

Installation	SURFACE / RECESSED
Construction	ALUMINIUM & OPAL
Length	2000 MM
Width / Depth	16 MM
Height	7 MM
Finish	ALUMINIUM
IP Rating	IP20

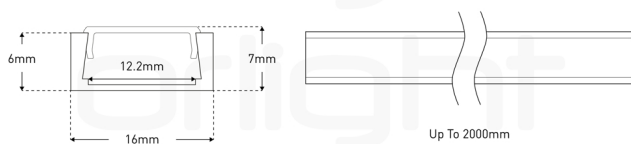

ORLRPVALUHS-TP7-2M

Item No: PROTRIM – 15322


orlight[®]
FROM SOURCE TO SITE

EVO



24V EVO CRI90

EVO4



IP RATED

PROFILE



ORLRPVALUHS-CF-2M

15264

Coffer Profile

ACCESSORIES



ORLRPVALUHS-TP7-CLIP

31437

Mounting Clip



ORLRPVALUHS-TP7/TP12-TL-BRACKET

15325

Tilt Profile Bracket