


Ref:

ORL2737-BL-LED-3000K


Item No: ORL2737 – 13510

orlight[®]
FROM SOURCE TO SITE

Mini recessed wall fixture featuring Aluminium construction and integrated LED chipset. Small product footprint ensures discreet application with downward lighting effect. A CRI value > Ra 80 light quality assurance. Available in a number of finishes and driver configurations for chosen dimming protocol. Please Note: This product does not support hot plugging.

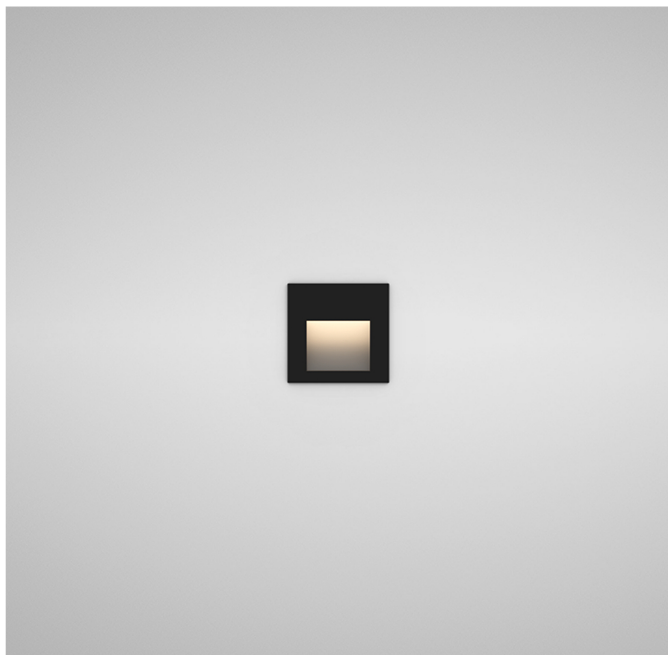

DIMENSIONS

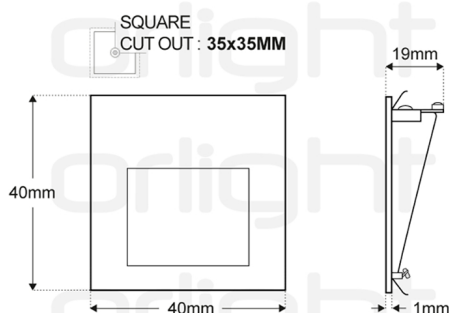

OPTICAL PERFORMANCE

Wattage	1W
Lumen Output	135LM
Efficacy	135LM/W
CCT	3000K
CRI	CRI > 80
Chipset	LED 2835 CHIPSET

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	3V
Milliamp / Current	350MA
Driver Configuration	REMOTE

CONSTRUCTION

Installation	WALL RECESSED
Construction	ALUMINIUM
Length	40 MM
Width / Depth	19 MM
Height	40 MM
Cutout	35 X 35 MM
Weight	0.02KG
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20

DRIVER CONFIGURATION

CONTROL	IP RATING	DRIVER	CODE	MIN. FITTING	MAX. FITTING
---------	-----------	--------	------	--------------	--------------

ORL2737-BL-LED-3000K

Item No: ORL2737 – 13510

orlight[®]
FROM SOURCE TO SITE

CONTROL	IP RATING	DRIVER	CODE	MIN. FITTING	MAX. FITTING
Switched	IP68	ORLRPV350CC	15231	1	8
Switched	IP42	ORLRPV350-35-APC	15230	10	30
Switched	IP66	ORLRPV350-35-APC-IP66	31555	10	30
Mains	IP20	ORLRPV20D-350MA	46595	1	13
1-10V/Push	IP20	MAXDR-MINI-350MA	22251	1	15
DALI	IP20	ORL-DALI-NFC-15CC-350MA	34715	2	13

SWITCHED (IP42)



ORLRPV350-35-APC
15230
Constant current 350mA Driver

SWITCHED (IP66)



ORLRPV350-35-APC-IP66
31555
Constant current 350mA Driver

SWITCHED (IP68)



ORLRPV350CC
15231
Constant current 350mA Driver

ORL2737-BL-LED-3000K

Item No: ORL2737 – 13510

orlight[®]
FROM SOURCE TO SITE

MAINS (IP20)




ORLRPV20D-350MA

46595

Mains Dimmable Driver

1-10V/PUSH DIM (IP20)



MAXDR-MINI-350MA

22251

Mini 1-10V/DALI & Push Dimming Driver

DALI (IP20)



ORL-DALI-NFC-15CC-350MA

34715

NFC Programmable 15W CC 350mA DALI
Driver