

Ref:

ULTRA-4C-29W-WH-3K4K-DALI-B-EM

Item No: ULTRA CURVE – 35493

orlight[®]
FROM SOURCE TO SITE


Our Ultra Curve fixtures feature a slim design that seamlessly blends into any commercial space. These versatile fixtures can be surface mounted or suspended, offering flexible installation options. With switchable colour temperatures from 3000K to 4000K, they provide adaptable lighting solutions to suit various environments. Combining sleek aesthetics with functionality, Ultra Curve is the perfect choice for modern lighting needs.



SWITCHABLE
CCT

IP44

DIMENSIONS

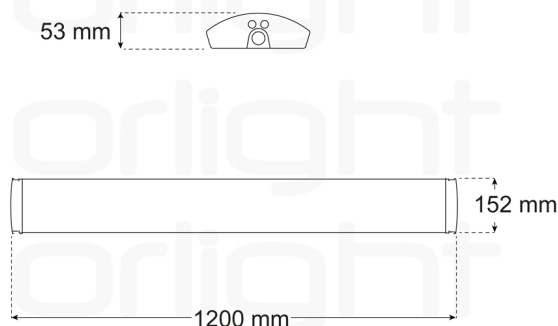

OPTICAL PERFORMANCE

Wattage	29W
Lumen Output	4147LM / 4321LM
Efficacy	143LM/W / 149LM/W
CCT	3000K/4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	105°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-240V
Milliamp / Current	250MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Length	1200 MM
Width / Depth	152 MM
Height	53 MM
Weight	2.05KG
Finish	WHITE
RAL	RAL 9003
IP Rating	IP44
IK Rating	IK07
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	405LM / 433LM

ULTRA-4C-29W-WH-3K4K-DALI-B-EM

Item No: ULTRA CURVE – 35493

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION

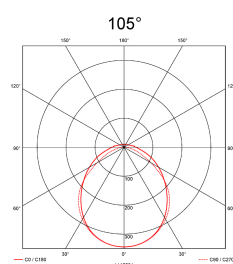

ADDITIONAL PRODUCT IMAGES



SUSPENSION KIT



ULTRA-C-SUS-KIT-1M

41238

Ultra Suspension Kit