

Ref:

ORLGS1-AW

Item No: ORLGS1 – 14222



Midsize fixed architectural downlight featuring a high specification reflector and recessed light source, a combination that serves to minimise glare and enhance light distribution. Sits discreetly in-situ due to minimal trim bezel. Configured for use with Orlight LED Engines. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE


LOR	92
-----	----

CONSTRUCTION


Installation	RECESSED
Construction	ALUMINIUM
Diameter	100 MM
Height	63 MM
Cutout	90 MM
Tilt	FIXED
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP20
Compatible Light Source	LED ENGINE
Lamp Change	CLIP MECHANISM

ADDITIONAL DIMENSIONS

ORLGS1-IP20  **FIXED**

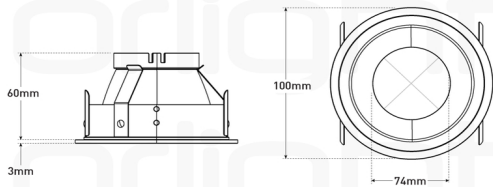

ORLGS1-IP20 with **LED ENGINES**  **FIXED**
Allow +5mm for Cable Clearance

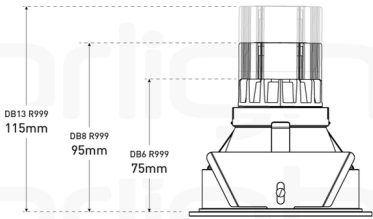

ORLGS1-AW

Item No: ORLGS1 – 14222

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999