

Ref:

ORL019-CH-GU10

Item No: ORL019 – 12791

orlight[®]
FROM SOURCE TO SITE

Directional architectural miniature downlight featuring an anti-glare baffle and minimal bezel. 65mm diameter for discreet installation with 20 degree tilt capability. Please note this product is not suitable for use with conical fire hoods. Please contact the sales office for fire hood specification. Standard GU10 lamp holder included. Orlight does not recommend cutting of holes prior to receipt of product in hand.



OPTICAL PERFORMANCE

LOR	46
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	65 MM
Height	50 MM
Cutout	56 MM
Weight	0.14KG
Tilt	20°
Rotation	360°
Finish	CHROME
IP Rating	IP20
Compatible Light Source	GU10 / ENGINE
Lamp Change	REMOVAL OF FIXTURE

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORL019-CH-GU10

Item No: ORL019 – 12791

orlight®
FROM SOURCE TO SITE

DIMENSIONS

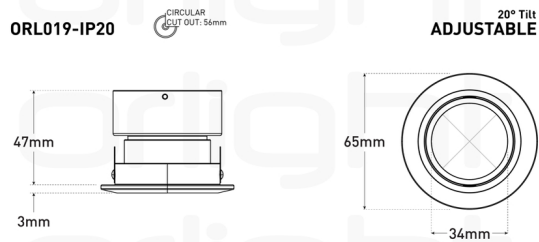


ADDITIONAL DIMENSIONS

ORL019-IP20 with LED ENGINES

CIRCULAR CUT OUT: 56mm


ADJUSTABLE - 20° Tilt
Allow +5mm for Cable Clearance



ORL019-IP20 with GU10 LAMPS

CIRCULAR CUT OUT: 56mm

ADJUSTABLE - 20° Tilt
Allow +20mm for Cable Clearance



COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999

ORL019-CH-GU10


Item No: ORL019 – 12791

orlight[®]
FROM SOURCE TO SITE



DB13-R999

ACCESSORIES



LOUVRE-HC
11753
Honeycomb Louvre