


Ref:

ORL-X14U-WH-4K-MS-EM


Item No: ORLX14 – 31674

orlight[®]
FROM SOURCE TO SITE

High Powered IP65 rated fixture with polycarbonate construction and anti-glare diffuser. Integral control gear, with CRI>80 to ensure light quality. Side conduit entry points and twist / lock mechanism diffuser for ease of installation and maintenance.

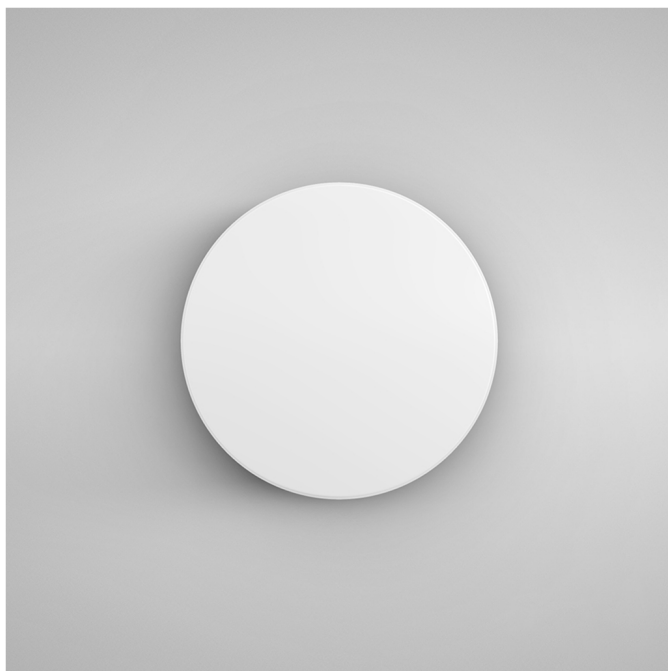

DIMENSIONS

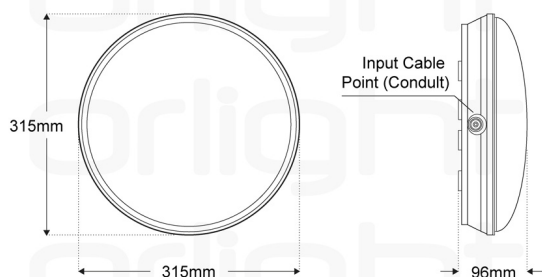

OPTICAL PERFORMANCE

Wattage	20W
Lumen Output	2380LM
Efficacy	119LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	200-240V
Milliamp / Current	520MA
Driver Configuration	INTEGRAL
Control	MICROWAVE SENSOR-EM

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Diameter	315 MM
Height	96 MM
Finish	WHITE
RAL	RAL 9016
IP Rating	IP65
IK Rating	IK06
Operating Ambient Temperature	-20°C - +45°C

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	358LM

ORL-X14U-WH-4K-MS-EM

Item No: ORLX14 – 31674

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

