

Ref:

# NEBULADQ-150-SUS-21W-WH-3K-DALIB-EM orlight®


Item No: NEBULA SUSPENDED – 31024

FROM SOURCE TO SITE

NEBULADQ-SUS-150 is a high-performance UGR<19 suspended LED downlight in durable aluminium, delivering uniform downward light distribution. High lumen output and CRI >85 for excellent visual clarity in commercial and architectural applications. Supplied with a 30° optic as standard; 60° optic available to order. Emergency versions are supplied with remote emergency gear, for streamlined installation with a minimalist suspended profile. Please note: the driver and emergency inverter are remote to the fitting.



## DIMENSIONS

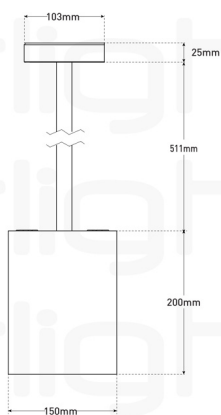

## OPTICAL PERFORMANCE

|                      |                     |
|----------------------|---------------------|
| Wattage              | 21W                 |
| Lumen Output         | 2478LM              |
| Efficacy             | 118LM/W             |
| CCT                  | 3000K               |
| CRI                  | CRI > 85            |
| Binning              | 2 STEP MACADAMS     |
| Beam Angle           | 30° / 60°           |
| UGR                  | UGR < 19            |
| Chipset              | CITIZEN LED CHIPSET |
| Calculated Chip Life | L70 > 105,000HRS    |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 36V              |
| Milliamp / Current          | 500MA            |
| Driver Configuration        | INTEGRAL         |
| Control                     | DALI DIMMABLE    |

## CONSTRUCTION

|                               |               |
|-------------------------------|---------------|
| Installation                  | SUSPENDED     |
| Construction                  | ALUMINIUM     |
| Diameter                      | 150 MM        |
| Height                        | 200 MM        |
| Weight                        | 2.8KG         |
| Tilt                          | FIXED         |
| Finish                        | WHITE         |
| RAL                           | RAL 9016      |
| IP Rating                     | IP20          |
| Operating Ambient Temperature | -20°C - +35°C |

## EMERGENCY

|                         |                |
|-------------------------|----------------|
| Emergency               | YES            |
| Emergency Configuration | REMOTE         |
| Emergency Duration      | EMERGENCY 3HRS |
| EM Lumen                | 372LM          |

# NEBULADQ-150-SUS-21W-WH-3K-DALIB-EM orlight®

Item No: NEBULA SUSPENDED – 31024

FROM SOURCE TO SITE

## LIGHT DISTRIBUTION

