

Ref:

NEBULADQ-SF-WH-27W-4K-DALI-B-EM


Item No: NEBULA SURFACE – 12386

orlight[®]
FROM SOURCE TO SITE

NEBULADQ-SF-200 is a UGR<19, surface mounted downlight, constructed from Aluminium which provides a downward directional light distribution. This downlight features a high lumen output and CRI >85 for light quality assurance. The product is supplied with a 60° optic as standard. Please note: the driver and emergency inverter are integral to the fitting.



DIMENSIONS

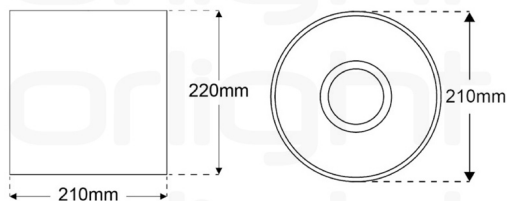

OPTICAL PERFORMANCE

Wattage	27W
Lumen Output	2862LM
Efficacy	106LM/W
CCT	4000K
CRI	CRI > 85
Binning	2 STEP MACADAMS
Beam Angle	60°
UGR	UGR < 19
Chipset	CITIZEN LED CHIPSET
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	700MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Diameter	210 MM
Height	220 MM
Weight	3.32KG
Tilt	FIXED
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
Operating Ambient Temperature	-20°C - +35°C

EMERGENCY

Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	285LM

NEBULADQ-SF-WH-27W-4K-DALI-B-EM

Item No: NEBULA SURFACE – 12386

LIGHT DISTRIBUTION

