

Ref:

ORLLM732-SS-6000K


Item No: AMARIS DISPLAY – 14952

orlight[®]
FROM SOURCE TO SITE

Miniature display light featuring Stainless Steel construction rated to IP65 making this product suitable for both interior and exterior applications. The product is directional and thus perfect for lighting focal features on the wall or within display cabinets. Incorporates an integrated CREE USA LED white chip set powered at 1W. A low energy, no maintenance solution. Please Note: This product does not support hot plugging.



DIMENSIONS

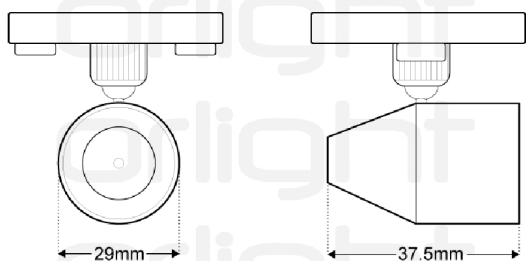

OPTICAL PERFORMANCE

Wattage	3W
Lumen Output	53LM
Efficacy	53LM/W
CCT	6000K
CRI	CRI > 70
Binning	2 STEP MACADAMS
Beam Angle	20°
Chipset	XPE
Chip Life	L70 > 60,500HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	3V
Milliamp / Current	350MA
Driver Configuration	REMOTE
Cable Length	1100MM

CONSTRUCTION


Installation	SURFACE MOUNTED
Construction	STAINLESS STEEL
Diameter	29 MM
Width / Depth	37.5 MM
Tilt	ADJUSTABLE
Finish	STAINLESS STEEL
IP Rating	IP65
IK Rating	IK07
Operating Ambient Temperature	-20°C - +45°C

ORLLM732-SS-6000K

Item No: AMARIS DISPLAY – 14952

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



PLEASE NOTE:

This product does not support hot plugging