

Ref:

ATLAS-FL-6W-WH-3000K

Item No: ATLAS – 10375

orlight[®]
FROM SOURCE TO SITE

Flush downlight, 46mm cutout, rotatable 350° with 90° tilt, high quality optical lens with a variety of beam angles, interchangeable black, white or gold decoration rings. Suitable for residential environments; provides minimalism, functionality and versatility for direction of light. CRI >90; colour consistency via 2-Step MacAdams Ellipse binning. Please Note: Does not support hot plugging. Orlight does not recommend cutting holes before product is received.




UGR
< 19

IP20

DIMENSIONS

CIRCULAR
CUT OUT : 46MM

90° Tilt
ADJUSTABLE

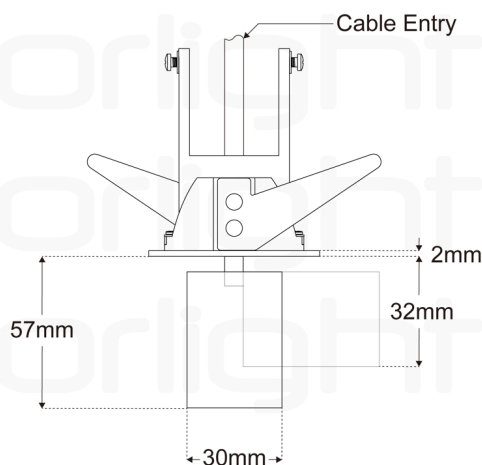

OPTICAL PERFORMANCE

Wattage	6W
Lumen Output	391LM
Efficacy	65LM/W
CCT	3000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	30°
UGR	UGR < 19
Chipset	CREE XHP35
Chip Life	L80 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	12V
Milliamp / Current	350MA
Driver Configuration	REMOTE

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	54 MM
Height	64 MM
Cutout	46 MM
Weight	0.13KG
Tilt	90°
Rotation	355°
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	REMOTE

ATLAS-FL-6W-WH-3000K

Item No: ATLAS – 10375

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION

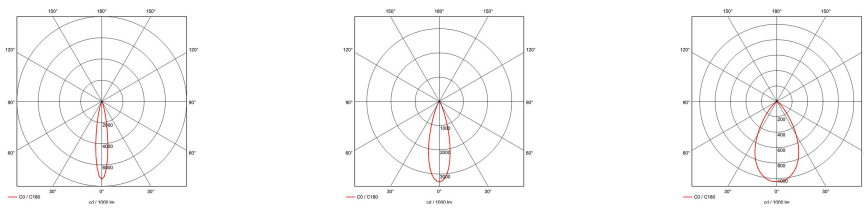


ADDITIONAL PRODUCT IMAGES



ADDITIONAL DIMENSIONS

CIRCULAR
CUT OUT : 46MM

90° Tilt
ADJUSTABLE

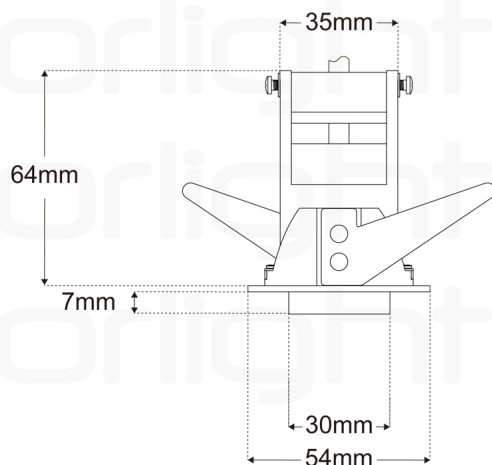

ATLAS-FL-6W-WH-3000K

Item No: ATLAS – 10375

orlight[®]
FROM SOURCE TO SITE

SWITCHED/MAINS DRIVER



999-ORLRPV10D-350MA

40235

Switched Driver

1-10V/DALI DRIVER



ORL-DALI-NFC-15CC-350MA

34715

NFC Programmable 15W CC 350mA DALI
Driver

ACCESSORIES



ATLAS-DR-WH

10373

White Ring for Atlas



ATLAS-DR-GOLD

10372

Gold Ring for Atlas



ATLAS-15D-LENS

10367

15 Degree Lens for Atlas



ATLAS-55D-LENS

10368

55 Degree Lens for Atlas