

Ref:

ORLOSP8-PL-SN-400-3000K


Item No: 15137

orlight[®]
FROM SOURCE TO SITE

Drop ceiling fixture with integrated LED chipset. Constructed from Aluminium with Satin Nickel finish. Diffuse LED trail with values in excess of CRI>90 to ensure quality and consistency of light.



DIMENSIONS

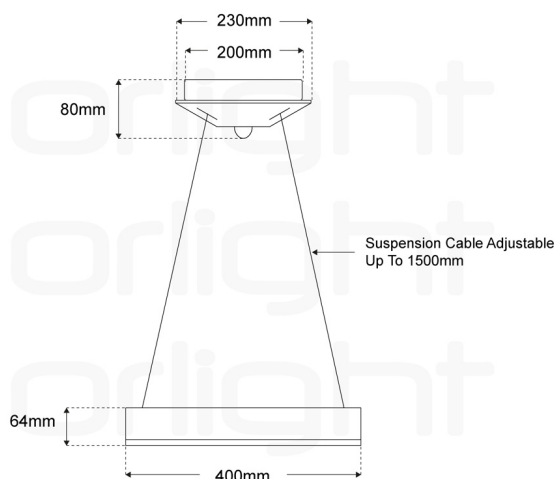

OPTICAL PERFORMANCE

Wattage	28W
Lumen Output	2240LM
Efficacy	80LM/W
CCT	3000K
CRI	CRI > 90
Chipset	SMD 2835

ELECTRICAL

Voltage	220-240V
Driver Configuration	INTEGRAL
Control	SWITCHED
Cable Length	1500MM


CONSTRUCTION

Installation	CEILING MOUNTED
Construction	ALUMINIUM
Diameter	400 MM
Height	64 MM
Finish	SATIN NICKLE
IP Rating	IP20

ORLOSP8-PL-SN-400-3000K

Item No: 15137

LIGHT DISTRIBUTION



FIXING DETAILS

